

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

06/05/98

JCS45  
U.S. PAT.  
86USCI

<b>CKET NUMBER</b>	<b>ANTICIPATED CLASSIFICATION OF THIS APPLICATION:</b>		<b>PRIOR APPLICATION</b>	
	<b>CLASS</b>	<b>SUBCLASS</b>	<b>EXAMINER</b>	<b>ART UNIT</b>
86USCI			UNKNOWN	1305

CERTIFICATE UNDER 37 CFR 1.10

"Express Mail" mailing label number EL039320218US  
Date of Deposit June 5, 1998

I hereby certify that this paper or fee is being deposited with the U S Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Assistant Commissioner for Patents, Washington, D C 20231

By  
Name

*[Signature]*

*Bill Smith*

CONTINUATION APPLICATION UNDER 37 C.F.R. § 1.53(b)

BOX PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, DC 20231

Dear Sir:

This is a request for filing a continuation application under 37 CFR § 1.53(b) of Serial No. 08/884,205, filed on June 27, 1997 entitled REVERSE FLOW AIR FILTER ARRANGEMENT AND METHOD by the following inventor(s):

<b>Full Name Of Inventor</b>	<b>Family Name</b> ENGEL	<b>First Given Name</b> DONALD	<b>Second Given Name</b> FRANCIS
<b>Residence &amp; Citizenship</b>	<b>City</b> PRIOR LAKE	<b>State or Foreign Country</b> MINNESOTA	<b>Country of Citizenship</b> USA
<b>Post Office Address</b>	<b>Post Office Address</b> 6480 GLASCOW TRAIL S E	<b>City</b> PRIOR LAKE	<b>State &amp; Zip Code/Country</b> MINNESOTA 55372/USA
<b>Full Name Of Inventor</b>	<b>Family Name</b> BARTELS	<b>First Given Name</b> DOLAN	<b>Second Given Name</b>
<b>Residence &amp; Citizenship</b>	<b>City</b> CRESCO	<b>State or Foreign Country</b> IOWA	<b>Country of Citizenship</b> USA
<b>Post Office Address</b>	<b>Post Office Address</b> 617 GILLETTE AVENUE	<b>City</b> CRESCO	<b>State &amp; Zip Code/Country</b> IOWA 52136/USA
<b>Full Name Of Inventor</b>	<b>Family Name</b> HAROLD (DECEASED)	<b>First Given Name</b> DON	<b>Second Given Name</b>
<b>Residence &amp; Citizenship</b>	<b>City</b> PRIOR LAKE	<b>State or Foreign Country</b> MINNESOTA	<b>Country of Citizenship</b> USA
<b>Post Office Address</b>	<b>Post Office Address</b> 16687 LYONS AVENUE S	<b>City</b> PRIOR LAKE	<b>State &amp; Zip Code/Country</b> MINNESOTA 55372/USA
<b>Full Name Of Inventor</b>	<b>Family Name</b> HACKER	<b>First Given Name</b> JOHN	<b>Second Given Name</b>
<b>Residence &amp; Citizenship</b>	<b>City</b> BLOOMINGTON	<b>State or Foreign Country</b> MINNESOTA	<b>Country of Citizenship</b> USA
<b>Post Office Address</b>	<b>Post Office Address</b> 8416 YORK ROAD	<b>City</b> BLOOMINGTON	<b>State &amp; Zip Code/Country</b> MINNESOTA 55431/USA
<b>Full Name Of Inventor</b>	<b>Family Name</b> CRENSHAW	<b>First Given Name</b> BRUCE	<b>Second Given Name</b>
<b>Residence &amp; Citizenship</b>	<b>City</b> INDIANAPOLIS	<b>State or Foreign Country</b> INDIANA	<b>Country of Citizenship</b> USA
<b>Post Office Address</b>	<b>Post Office Address</b> 1628 MCCOLLUGH DR	<b>City</b> INDIANAPOLIS	<b>State &amp; Zip Code/Country</b> INDIANA 46260/USA

1. ☒ Enclosed is a copy of the prior application; including the specification, claims, drawings, oath or declaration showing the applicant's signature, and any amendments referred to in the oath or declaration filed to complete the prior application. (It is noted that no amendments referred to in the oath or declaration filed to complete the prior application introduced new matter therein.) The continuing application is as follows: 46 pages of specification, 14 claims, 1 pages of abstract, 13 sheets of drawings, and 4 pages of oath or declaration.
- ☒ The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
2. ☒ Cancel original claims 2-14 of this application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
3. ☒ The filing fee is calculated below:

**CLAIMS AS FILED**

NUMBER FILED	NUMBER EXTRA		RATE	FEE
<b>TOTAL CLAIMS:</b>				
20 -20	0	x	\$22.00	\$0.00
<b>INDEPENDENT CLAIMS</b>				
2 -3	0	x	\$82.00	\$0.00
			<b>BASIC FILING FEE:</b>	<b>\$790.00</b>
			<b>TOTAL FILING FEE:</b>	<b>\$790.00</b>

- ☐ A Verified Statement that this filing is by a small entity is already filed in the prior application.
- ☐ A Verified Statement that this filing is by a small entity is attached.
4. ☒ Payment of fees:
    - ☒ Attached is a check in the amount of \$790.00.
    - ☐ Please charge Deposit Account No. 13-2725.
  5. ☒ The Commissioner is hereby authorized to charge any additional fees as set forth in 37 CFR §§ 1.16 to 1.18 which may be required by this paper or credit any overpayment to Account No. 13-2725.
  6. ☐ Amend the specification by inserting before the first line the sentence:
  7. ☐ A set of formal drawings (\_\_\_\_ sheets) is enclosed.
  8. ☐ Priority of application Serial No. \_\_\_\_\_, filed on \_\_\_\_\_ in \_\_\_\_\_, is claimed under 35 U.S.C. 119.
  - ☐ The certified copy has been filed in prior application Serial No. \_\_\_\_\_, filed \_\_\_\_\_.
  9. ☒ The prior application is assigned of record to Donaldson Company, Inc. located at Minneapolis, Minnesota.
  10. ☒ The Power of Attorney in the prior application is to:


Merchant, Gould, Smith, Edell,  
Welter & Schmidt, P.A.  
3100 Norwest Center

90 South Seventh Street  
Minneapolis, MN 55402-4131

11. ☒ A preliminary amendment is enclosed. (Claims added by this amendment have been properly numbered consecutively beginning with the number next following the highest numbered original claim in the prior application.)
- ☐ Fee for excess claims is attached.
12. ☐ A petition and fee has been filed to extend the term in the prior application until \_\_\_\_\_. A copy of the petition for extension of time in the prior application is attached.
13. ☐ The inventor(s) in this application are less than those named in the prior application and it is requested that the following inventors identified above for the prior application be deleted:
14. ☒ Also Enclosed: Information Disclosure Statement, PTO Form 1449, cited references and Declaration of Shirley A. Harold
15. ☒ Address all future communications to the **Attention of Randall A. Hillson** (may only be completed by attorney or agent of record) at the address below.
16. ☒ A return postcard is enclosed.

Respectfully submitted,  
Merchant, Gould, Smith, Edell,  
Welter & Schmidt, P.A.  
3100 Norwest Center  
90 South Seventh Street  
Minneapolis, MN 55402  
612/332-5300

Dated: 5 June, 1998

  
Julie R. Daulton  
Reg. No. 36,414  
JRD:PSTslc

S/N NEW FILING

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	ENGEL ET AL.	Examiner:	UNKNOWN
Serial No.:	NEW FILING	Group Art Unit:	UNKNOWN
Filed:	HEREWITH	Docket No.:	758.556USC1
Title:	REVERSE FLOW AIR FILTER ARRANGEMENT AND METHOD		

---

CERTIFICATE UNDER 37 CFR 1.10

'Express Mail' mailing label number: EL039320218US

Date of Deposit: June 5, 1998

I hereby certify that this correspondence is being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

By:   
Name:

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Prior to examination, kindly amend this application as follows:

**In the Cross-Reference to Related Application**

Please delete the current cross-reference to related application and insert the following therefor:

--This application is a continuation of application Serial No. 08/884,205, filed June 27, 1997. Application 08/884,205 is a continuation-in-part of application Serial No. 08/742,244, filed October 31, 1996, now U.S. Patent No. 5,690,712. Application 08/742,244 is a divisional of application 08/344,371, filed November 23, 1994, now U.S. Patent No. 5,613,992.--

### **In the Claims**

Please cancel claim 1. Please add new claims 15–34 as follows:

15. A filter element comprising:
- (a) inner and outer, spaced cylindrical, liners having first and second ends;
    - (i) said inner liner defining an open, cylindrical internal volume;
  - (b) filter media positioned between said inner and outer, spaced, cylindrical liners;
  - (c) first and second end caps;
    - (i) each one of said first and second end caps comprising soft, compressible, polyurethane foam;
    - (ii) said first ends of said inner and outer, spaced, cylindrical liners being embedded in said first end cap;
    - (iii) said second ends of said inner and outer, spaced, cylindrical liners being embedded in said second end cap; and,
  - (d) a plastic insert having a plurality of radially outwardly directed feet projecting therefrom;
    - (i) said insert being positioned with said radially outwardly directed feet being oriented adjacent said first end of said inner cylindrical liner and at least partially underneath said first end cap; and
    - (ii) said insert further being positioned with a circular perimeter portion thereof supported by said plurality of feet to project into said open internal volume defined by said inner cylindrical liner.
16. A filter element according to claim 15 wherein:
- (a) said first end cap has an annular sealing region thereon; said annular sealing region comprising said soft, compressible polyurethane foam and having at least first and second stepped portions;
    - (A) said first stepped portion having an outermost dimension smaller than an outermost dimension of said second stepped portion.

17. A filter element according to claim 15 wherein:
  - (a) said insert includes a surface portion with at least one free rise aperture extending therethrough.
18. A filter element according to claim 17 wherein:
  - (a) said insert surface portion includes a plurality of free rise apertures extending therethrough.
19. A filter element according to claim 18 wherein:
  - (a) each one of said feet is secured to said circular perimeter portion of said insert by a flexible leg section.
20. A filter element according to claim 19 wherein:
  - (a) said filter media includes an extension of pleated cellulose fiber media.
21. A filter element according to claim 19 wherein:
  - (a) said insert defines a central aperture; said central aperture in said insert being smaller in diameter than a diameter of said inner liner.
22. A filter element according to claim 21 wherein:
  - (a) an internal diameter of the inner liner within the range of 6-8.5 inches.
23. A filter element according to claim 19 wherein:
  - (a) said feet are evenly, radially, spaced in projection outwardly from said circular perimeter portion of said insert.
24. A filter element according to claim 19 wherein:
  - (a) said first endcap includes a stepped, radially sealing, portion thereon.

25. A filter element according to claim 19 including:
- (a) a plurality of standing ribs extending from said surface portion.
26. A filter element according to claim 25 wherein:
- (a) each of said ribs extend from said circular perimeter portion toward a central aperture in said insert.
27. A filter assembly comprising:
- (a) a filter element; said filter element having an extension of media and a first end cap at a first end of said extension of media;
    - (i) said first end cap having an annular sealing region thereon; said annular sealing region comprising a soft, compressible polymeric material and having at least first and second stepped portions;
      - (A) said first stepped portion having an outermost dimension smaller than an outermost dimension of said second stepped portion;
    - (ii) said filter element first end cap including a rigid portion aligned with said first end cap annular sealing region;
  - (b) a housing; said housing including an outer surrounding wall having a first end and a first segment; said first segment:
    - (i) being spaced from and parallel to said outer surrounding wall;
    - (ii) being supporting by said outer surrounding wall in projection outwardly from said outer surrounding wall first end; and
    - (iii) having a rigid, inner, annular, sealing region;
  - (c) said filter element being removably oriented within said housing; said first and second stepped portions of said first end cap annular sealing region being compressed against said first segment inner annular sealing region to form a radial seal therewith and positioned between said end cap rigid portion and said first segment inner annular sealing region.
28. A filter assembly according to claim 27 including:

- (a) an inner liner embedded in said first end cap and supporting said extension of media; and
- (b) a plastic insert having a plurality of radially outwardly directed feet projecting therefrom;
  - (i) said insert being positioned with said radially outwardly directed feet being oriented adjacent to a first end of said inner liner and at least partially underneath said first end cap; and
  - (ii) said insert further being positioned with a perimeter portion thereof supported by said plurality of feet to project into an open internal volume defined by said inner liner.

29. A filter assembly according to claim 27 wherein:

- (a) said sealing region of said first end cap includes a third stepped portion; said outermost dimension of said second stepped portion being smaller than an outermost dimension of said second stepped portion.

30. A filter assembly according to claim 29 wherein:

- (a) said sealing region of said first end cap comprises foamed polyurethane; and
- (b) said first end cap rigid portion is parallel to said outer surrounding wall.

31. A filter assembly according to claim 30 wherein:

- (a) said outer surrounding wall comprises metal; and
- (b) said first end cap rigid portion comprises metal.

32. A filter assembly according to claim 31 wherein:

- (a) said first end cap rigid portion comprises an outer support liner.

33. A filter assembly according to claim 32 further including:

- (a) a second end cap at a second end of said extension of media; said outer support liner extending between said first and second end caps; and



- (b) an inner support liner extending between said first and second end caps.
34. A filter assembly according to claim 27 wherein:
- (a) said annular sealing region is cylindrical;
  - (b) first end cap annular sealing region is cylindrical; and
  - (c) said filter element is cylindrical.

### REMARKS

This application is a Rule 53(b) continuation of application 08/884,205. Claims 15-34 are pending.


Applicants have submitted herewith an Information Disclosure Statement. The Examiner is asked to consider the Information Disclosure Statement with respect to the claims pending herein. Applicants have submitted their previous patents for any consideration of double patenting, obviousness-type double patenting, or issues under § 102(e).

Applicants respectfully request examination and allowance of the pending claims.

If the Examiner believes a telephone conference would advance the prosecution of this application, the Examiner is invited to telephone the undersigned at the below listed telephone number.

Respectfully submitted,  
Merchant, Gould, Smith, Edell,  
Welter & Schmidt, P.A.  
3100 Norwest Center  
90 South Seventh Street  
Minneapolis, MN 55402  
612/332-5300

Dated: 5 JUNE, 1998

  
Julie R. Daulton  
Reg. No. 36,414  
JRD:PSTslc

**REVERSE FLOW AIR FILTER ARRANGEMENT AND METHOD****Cross-Reference to Related Applications**

5           The present application is a continuation-in-part  
application of U.S. serial no. 08/742,244, filed  
October 31, 1996. U.S. serial no. 08/742,244 was a  
divisional of U.S. serial no. 08/344,371, filed  
November 23, 1994. The complete disclosure of application  
10 U.S. serial no. 08/742,244 is incorporated herein by  
reference. Application serial no. 08/344,371 issued on  
March 25, 1997 as U.S. Patent 5,613,992. The complete  
disclosures of U.S. Patent 5,613,992 and the application  
which issued as the '992 patent are also incorporated  
15 herein by reference.

**Field of the Invention**

          The present invention relates to reverse flow air  
cleaner arrangements. That is, the invention concerns air  
20 cleaner arrangements wherein filtering flow is in a  
direction with the "clean" side of the air filter being  
around an exterior thereof, and the "dirty" side of the air  
filter being along an interior thereof. The invention  
particularly concerns such air cleaner arrangements having  
25 drainage systems for water accumulating in an interior of  
associated air filter elements. The invention also  
concerns provision of preferred components, such as air  
filter elements, for use with such arrangements; and, to  
methods involving the use of such arrangements.

### Background of the Invention

In general, air cleaner arrangements include a housing and an air filter element. The housing is configured such that air is directed through the air filter  
5 element, for filtering. Various geometric configurations of the air cleaner housing, the air filter element, and related seal arrangements are used to effect this.

Many air cleaner arrangements include generally cylindrical air filter elements. Such elements typically  
10 include filter media arranged in a cylindrical pattern, with end caps. Seal arrangements are used either on or in conjunction with the end caps, to provide appropriate sealing with the housing or other portions of the air cleaner, and to control the direction of air flow.

15 Reverse air flow air cleaner arrangements are generally those in which air is directed to an interior of the air filter element before it is filtered, and the air is filtered as it passes through the air filter element from the interior to the exterior. If the air filter  
20 element is cylindrical, this means that the unfiltered air is directed into the interior of the cylinder, and then through the filter media, to an exterior, during filtering.

Material entrained in the air directed into the air filter, then, is left along an interior of the cylindrical  
25 filter media.

Consider, for example, a reverse flow air cleaner arrangement, having a cylindrical air filter element, utilized on an over the highway truck. Air directed into

the interior of the cylindrical element may include dust, leaves, large particulates, and even moisture entrained therein. This material will tend to build up in the interior of the air filter element, in time. If the water depth inside the air filter becomes significant, the water, alone or with fine particulates or salt in suspension, can permeate the filter media. This has the potential to damage engine components. It would be preferred that arrangements be provided to drain the water from the interior of the filter element.

In those arrangements wherein the filter element is operationally oriented such that the longitudinal axis of the cylindrical air filter is substantially vertical, drainage arrangements involving drainage apertures in one of the end caps have been used. In general, these have involved offset (from a central location) apertures in one end cap, and unless the air filter element is oriented nearly perfectly vertically, drainage is inefficient. Also, in such arrangements debris can sometimes collect along interior surfaces of the housing when the arrangement is opened and the element is removed; and, unless the housing is thoroughly cleaned before the element is reinserted into the housing, the debris can interfere with attainment of a good seal at critical locations.

25

**Summary of the Disclosure of U.S. Serial No. 08/742,244**

According to the disclosure of U.S. serial no. 08/742,244, an air filter arrangement is provided. The air

filter arrangement includes a housing and an air filter element having first and second opposite end caps, filter media and an open filter interior. The first end cap has an air inlet opening therein, for air to be passed into the arrangement to be filtered. The second end cap has a central drainage aperture and an interior surface constructed and arranged to funnel moisture that collects on the second end cap interior surface to the central drainage aperture, and outwardly from the filter element.

10 The central drainage aperture is preferably positioned at a center of the second end cap, with a longitudinal axis of the air filter element passing therethrough. The air filter arrangement also includes an air flow direction arrangement constructed and arranged to direct air flow

15 into the housing, into the open filter interior, through the filter media for filtering and then outwardly from the housing, as filtered air. The air flow direction arrangement generally comprises various features of the housing, seals and filter element.

20 Preferably, the interior surface of the second end cap is circular. In certain embodiments it includes a plurality of radially directed troughs which terminate in the central drainage aperture. The troughs can be used to help funnel and direct moisture collected on an interior

25 surface of the air filter element in use (i.e., "when operationally" or "operatively" assembled).

In certain preferred arrangements, according to the U.S. serial no. 08/742,244 disclosure, the second end

cap includes an outer annular compressible portion and the housing includes an annular sealing surface against which the second end cap outer annular compressible portion is sealed, when the air filter arrangement is operatively  
5 assembled for use. Such a seal is referred to herein as a peripheral or annular radial seal, around the second end cap. That is, in this context the term "annular" refers to a sealing portion around the outside of the end cap, which seals under radial compression.

10 In a preferred embodiment, according to the U.S. serial no. 08/742,244 disclosure, the housing includes a base having a central, preferably recessed, pan and a sealing bead circumferentially positioned around the central recessed pan. A drainage aperture is provided in  
15 the central pan, so that water collected in the pan can be removed from the housing. With such an arrangement, preferably the second end cap is constructed and arranged to form a secondary seal with the sealing bead in the base, when the air filter element is operatively positioned  
20 within the housing. Preferably the manner of engagement with the seal bead is by provision of a mating "trough" in the second end cap outer surface.

According to the U.S. serial no. 08/742,244 disclosure, preferably the second end cap outer surface has  
25 an outer edge or lip; and, the second end cap outer surface is recessed (or depressed) in extension between the outer edge and the trough which engages the sealing bead and the base. In this manner, a preferred gap or space is provided

between the filter element second end cap, and the housing base, in the region between the sealing bead of the base and an outer peripheral area of the base. A space in this location accommodates debris that may collect in the housing, without interference with the seal between the second end cap and the housing. This is facilitated by those arrangements involving provision of the seal along an annular portion of the end cap, as a radial seal, rather than as an end or axial seal.

10           According to the U.S. serial no. 08/742,244 disclosure, preferably the second end cap outer surface is configured to provide a funnel surface having a declination angle of at least about  $1^{\circ}$ , and preferably  $1^{\circ}$  to  $3^{\circ}$ , in the region of extension between the outer edge of the second end cap and the portion of the end cap which engages the seal bead in the base.

20           In preferred arrangements, according to the U.S. serial no. 08/742,244 disclosure, an evacuation valve is mounted in the drainage aperture of the recessed pan in the base. This provides for a preferred, controlled, drainage of moisture from the system.

25           In preferred embodiments, according to the U.S. serial no. 08/742,244 disclosure, a soft polymeric material is utilized for the first and second end caps. Preferably each of the polymeric end caps comprise polyurethane. For the end caps, a polyurethane foam material having an "as molded" density of about 14-22 lbs per  $\text{ft}^3$  will be preferred (most preferably about 18.4). In some

embodiments, the same material can be utilized for both end caps.

In preferred constructions, according to the U.S. serial no. 08/742,244 disclosure, an air inlet tube is  
5 provided in the housing, which is configured to generate a radial seal with the first end cap of the filter element.

In an alternate embodiment, described in the U.S. serial no. 08/742,244 disclosure, an arrangement having a sheet metal end cap as the second end cap is provided.  
10 This arrangement is preferably axially sealed, by provision of a primary seal gasket axially compressed between the second end cap and the base, when the air filter arrangement is operationally assembled. A secondary gasket can also be provided in such arrangements between a  
15 selected portion of the second end cap and the housing base.

According to the U.S. serial no. 08/742,244 disclosure, a preferred filter element is provided. The preferred filter element comprises a generally cylindrical  
20 extension of filter media. The filter media may be, for example, a pleated paper filter media. Preferably, an inner support liner and an outer support liner are provided, for the cylindrical extension of filter media. Preferably the arrangement has first and second end caps,  
25 the first end cap including an air inlet opening therein. The second end cap preferably has a central drainage aperture and an interior surface constructed and arranged to funnel moisture, collected on the interior surface of



the second end cap, to the central drainage aperture. The central drainage aperture is preferably located at an approximate center of the end cap, on a longitudinal axis of the cylindrical extension of filter media. A preferred  
5 configuration for the interior surface of the second end cap, is as an interior of a funnel. In some embodiments, the second end cap interior surface includes a plurality of radially directed troughs therein, which terminate at the central drainage aperture.

10 Other preferred features for the preferred air filter element described in the U.S. serial no. 08/742,244 disclosure include: a circular sealing trough on an outer surface of the second end cap; and, a recess between an outer edge of the end cap outer surface and the circular  
15 trough. Also, a compressible region providing for a radial seal along an annular portion of the second end cap is preferred.

According to the U.S. serial no. 08/742,244 disclosure, a method of operating a reverse flow air filter  
20 arrangement is provided. In general, the method comprises collecting moisture within the filter element and draining the moisture from the filter element through a central aperture in the end cap, by funneling the moisture to the central aperture.

25

#### **Summary of the Present Disclosure**

According to the portion of the present specification which comprises added disclosure relating to

Figs. 9-14, the end cap which includes the drainage aperture therein, is provided in a preferred composite structure. The composite results from an outer portion comprising a soft, compressible, polymeric material; and, 5 an inner "pre-form" or insert, which becomes positioned between the polymeric material and the inner liner, during molding. The insert has preferred inner surface characteristics, to accomplish desirable flow of liquid to the drainage aperture, and outwardly from an interior of 10 the filter element. In addition, it has preferred features to facilitate molding using a free rise technique.

The preferred "pre-form" or insert also has depending legs with outwardly projecting feet. The legs and feet operate, cooperatively, as a mold stand-off for 15 media. An underside of each foot has a bead thereon, to facilitate this.

Further features and advantages from the preferred inserts and "pre-forms" described herein, as well as techniques for use, will be apparent from the more 20 detailed description below.

#### **Brief Description of the Drawings**

Fig. 1 is a side elevational view of an air cleaner arrangement according to the present invention.

25 Fig. 2 is a top plan view of the arrangement shown in Fig. 1.

Fig. 3 is an exploded plan view of the arrangement shown in Fig. 1.

Fig. 4 is an enlarged fragmentary side cross-sectional view of a portion of the arrangement shown in Fig. 1; Fig. 4 being generally taken along line 4-4, Fig. 1.

5 Fig. 5 is a fragmentary cross-sectional view of a portion of the arrangement shown in Fig. 1; Fig. 5 generally being taken along line 5-5, Fig. 1.

Fig. 6 is a fragmentary exploded view of a portion of the arrangement shown in Fig. 5.

10 Fig. 7 is a fragmentary top plan view of a portion of the arrangement shown in Fig. 6.

Fig. 8 is a fragmentary cross-sectional view of an alternate embodiment to that shown in Figs. 1-7.

Fig. 9 is a fragmentary cross-sectional view of a 15 second alternate embodiment of the present invention, taken from a point of view analogous to that used for Fig. 5.

Fig. 10 is a top plan view of a component used in the alternate embodiment of Fig. 9.

Fig. 11 is a cross-sectional view of the 20 component depicted in Fig. 10, taken along line 11-11 thereof.

Fig. 12 is a schematic representation of a method of assembling the embodiment of Fig. 9.

Fig. 13 is a fragmentary schematic representation 25 of a cross-section of a mold configuration usable to generate the assembly of Fig. 9.

Fig. 14 is a bottom plan view of a filter element including the component of Figs. 10 and 11 therein.

Fig. 15 is a schematic cross-sectional view depicting the component of Fig. 10 positioned in the mold of Fig. 13.

Fig. 16 is an enlarged view of one of the legs of 5 the component depicted in Fig. 11.

### Detailed Description

#### Disclosure of U.S. Serial No. 08/742,244 and Its Parent U.S. Serial No. 08/344,371

10           The reference numeral 1, Fig. 1, generally designates an air cleaner assembly according to the disclosure of serial no. 08/742,244. Fig. 1 is a side elevational view of air cleaner assembly 1. In the Figure, housing 2 is depicted generally. The housing 2 includes an 15 inlet construction 3 and a filter element receiver or can 4. Can 4 includes outlet 7. In use, air to be filtered passes through inlet construction 3, and is directed to an interior of can 4. Within can 4, the air is directed through a filter element, not viewable in Fig. 1. 20 After being filtered by the filter element, the air passes outwardly through outlet 7 and is directed to the air intake of the engine, not shown. Herein, the term "air flow direction arrangement" is used to generally refer to those features of an air filter arrangement which direct 25 air flow in the preferred manner or along a preferred path.

The term may refer to a variety of features, and typically refers to internal configurations of the housing and filter element, as well as the various seals.

Still referring to Fig. 1, inlet construction 3 is mounted on can 4, and is secured thereto by bolts 8 and nuts 9. Access to the interior of can 4, and a filter element positioned therein, is obtained by loosening 5 bolts 8 and separating inlet construction 3 from can 4.

For the particular construction shown, inlet construction 3 includes an upper dome 12, perforated air inlet screen 13 and an inlet tube 14 (the inlet tube not being viewable in Fig. 1, but being shown in Fig. 4 in 10 cross-section).

Still referring to Fig. 1, can 4 includes a drainage aperture therein, the drainage aperture not being viewable in Fig. 1, but being shown at reference numeral 18 in Fig. 5. The drainage aperture is covered by an 15 evacuation valve 19. The evacuation valve 19 may be, for example, as described in U.S. Patent 3,429,108, the disclosure of which is incorporated herein by reference. In general, the drainage aperture 18 is positioned in a portion of can 4 which will be, when assembly 1 is 20 operatively installed, positioned at the bottom of the assembly 1. Thus, water will tend to collect near aperture 18, and be drained therefrom, in use. This will be more readily apparent from further descriptions wherein internal details of air cleaner assembly 1 are presented.

25 Referring to Fig. 2, air cleaner assembly 1 includes four bolts and nuts 9 for securing the inlet construction 3 to the filter can 4. While the number of bolts used may be varied, depending on the particular

application, it is an advantage of constructions according to the 08/742,244 disclosure that filter assemblies as large as about 15 inches in outside diameter can be reliably secured closed, with as few as about three to five bolts. Features which facilitate this, will be apparent from further descriptions.

An exploded view of air cleaner assembly 1 is depicted in Fig. 3. In Fig. 3, air cleaner assembly 1 is shown with inlet construction 3 separated from filter can 4, and with air cleaner element 21 removed from can 4.

For the particular arrangement shown, air cleaner element 21 is generally cylindrical. Element 21 includes first and second end caps 23 and 24; filter media 25; inner support 26 (Fig. 4); and, outer support 27. For the particular embodiment shown, filter media 25 comprises a pleated paper construction 30. In general, pleated paper construction 30 comprises a cylinder 31 of fluted paper with the flutes running in a direction longitudinally along, and generally parallel to, a central axis 33 of the element 21. It will be understood that alternate filter media constructions could be utilized. In general, the filter media 25 extends between the end caps 23 and 24. For assembly 1 depicted, end caps 23 and 24 comprise polymeric material as described below, in which opposite ends of the filter media 25 are set or potted.

In Fig. 4 a fragmentary cross-sectional view of air cleaner assembly 1 is depicted. In Fig. 4, the inlet

construction 3 and portions of air cleaner assembly 1, in association therewith, are depicted.

In general, the filter media 25 is positioned between inner support 26 and outer support 27. Each support generally comprises a tubular or cylindrical extension of perforated metal or expanded metal, opposite ends of which are also set in, or potted in, end caps 23 and 24.

In general, end cap 23 is open and end cap 24 is closed. That is, end cap 23 includes a large inlet aperture 28 (Fig. 4) therein, for introduction of air to be filtered into filter element interior 35. End cap 24, on the other hand, is generally closed, but for a drainage aperture extending therethrough as described below.

Still referring to Fig. 4, it can be seen that inlet construction 3 includes inlet tube 14. When assembled, inlet tube 14 extends into aperture 28 in end cap 23. At least in this location, end cap 23 is preferably formed of a soft compressible material. When inlet tube 14 is not inserted into aperture 28, at least a portion of aperture 28 in its uncompressed state will generally have an inside diameter slightly larger than an outside diameter of section 39 of inlet tube 14; i.e., the portion of tube 14 which engages end cap 23 when arrangement 1 is operatively assembled. Thus, when inlet tube 14 is inserted through aperture 28, end cap material in region 40 will be compressed. In this manner a seal is formed at region 41. Such seals are described, for

example, in conjunction with air cleaner assemblies in U.S. Patent B2 4,720,292, the disclosure of which are incorporated herein by reference. It is noted that the arrangement of U.S. Patent 4,720,282 is not necessarily a reverse flow arrangement; however, the principles relating to the formation of the seal are basically the same. Such seals are sometimes referred to as "radial" or "radial-type" seals, since the forces maintaining sealing are directed radially around a central longitudinal axis (Fig. 3) of the tube and element, rather than co-extensively or coaxially therewith. For the particular arrangement shown in Figs. 1-7, material at region 40 is compressed between and against both inlet tube 14 and inner support 26; that is, inner support 26 is set sufficiently deeply into end cap 23 that a portion of it is positioned behind compressible region 40, to provide support. Thus, a good seal is effected. The shape of aperture 28 in region 41 will preferably be as a ribbed or stepped funnel (or tapered), to facilitate engagement. Such a ribbed arrangement is shown in 5,238,474, incorporated herein by reference. In U.S. 4,720,292 a similarly tapered surface without ribs is shown. Preferably, three equally sized steps from a region of diameter about the same as the inlet tube O.D. are used, with the amount of total compression of the smallest diameter rib (i.e., region of most compression) being about 21.4% ( $20\% \pm 3\%$ ). The size of each step will depend in part on the diameter of the inlet tube. In general, for an element used with an inlet tube



having an O.D. of 175-200 mm, a total compression thereacross of 2.7 mm (or 1.35 mm for any location since any location compresses about one-half of the total compression) for the smallest rib would be used.

5                   It will be understood, then, that for the arrangement shown in Figs. 1-7, seal 41 prevents air directed into filter interior 35 through inlet tube 14 from bypassing filter media 25 and getting into clean air plenum 44. In general, the various portions of the  
10 arrangement 4 cooperate as an air flow direction arrangement to direct air flow: into the housing, into the filter interior, through the filter media and outwardly from the housing.

Another point of potential leakage of unfiltered  
15 air into clean air plenum 44 is presented by the location whereat inlet construction 3 engages filter can 4. This region is located generally at 50; i.e., where bolts 8 secure inlet construction 3 to filter can 4. At region 50, inlet construction 3 is provided with an outwardly  
20 extending flange 52; and, can 4 is provided with an outwardly extending flange 53. Seal ring 54 is provided in extension around can 4, between flanges 52 and 53. Seal ring 54 is positioned at a location between bolts 8 and filter element 21. When bolts 8 are tightened, seal  
25 ring 54 will be compressed between flanges 52 and 53, i.e., at a location between inlet construction 3 and filter can 4, providing a seal. Thus, air leakage into plenum 44, by passage between portions of can 4 and inlet

construction 3 is inhibited. Filter ring 54 may be a conventional O-ring type gasket.

Attention is now directed to Fig. 5, which is a cross-sectional view showing the "bottom half" or "opposite end" of assembly 1 from the end whereat inlet construction 3 is located. Referring to Fig. 5, reference numeral 60 generally designates an end of can wall 61. Within end 60 is positioned a cover or base 63 of can 4. Base 63 is configured in a preferred manner, to advantage.

10 For the particular embodiment shown, base 63 is circular, to conform to the cross-sectional configuration of can wall 61 at end 60. For the particular embodiment shown, base 63 is also radially symmetric. That is, the features of base 63 are configured radially symmetrically  
15 about central axis 33. Base 63 includes end flange 65 for engagement with end 60, for example by means of welds.

Progressing inwardly from flange 65 toward its center 66, the features of the preferred base 63 depicted are as follows: an annular circumferential sealing  
20 surface 67 is provided; a bend or corner 68; an end surface 69; a secondary seal bead or ridge 70; and, a central pan 71. In the center 66 of pan 71, drainage aperture 18 is provided.

The arrangement shown in Figs. 1-7 is configured  
25 preferentially so that when oriented for use, pan 71 is at a lowermost or recessed location, so that water will drain to pan 71 under gravity influence. As the water drains into pan 71, it will be drained outwardly from air cleaner

assembly 1 through drainage aperture 18. Particular features described herein are provided, for a preferred manner of debris collection within assembly 1 and drainage of collected moisture to aperture 18.

5                Still referring to Fig. 5, filter element 21 includes end cap 24 thereon. End cap 24 is of an appropriate material, and of appropriate size, so that when it is pushed into and against base 63, an outer circumferential surface 75 of the end cap 24 engages  
10 surface 67 of base 63 in a sealing manner. That is, an annular seal 76 is formed in region 77, circumferentially around end cap 24. This is facilitated by preferably providing surface 67 in a cylindrical configuration extending generally parallel to axis 33. The seal prevents  
15 unfiltered air from reaching clean air plenum 44. As a result of the circumferential seal, sealing against flow of air is not required between any other portions of filter element 21 and base 63. A secondary seal 80, described herein below, is provided, however, between end cap 24 and  
20 base 63. The secondary seal 80 is generally provided to inhibit movement of debris or water into region 81, between element 21 and base 63, rather than to necessarily prevent flow of air therebetween. Thus, while seal 76 should be in a form sufficient to withstand a pressure differential  
25 thereacross of up to about 40 inches of H<sub>2</sub>O, secondary seal 80 will generally be sufficient if it can maintain at pressure differential thereacross of up to about 2 inches (and typically only up to about 2-4 inches) of H<sub>2</sub>O.

Still referring to Fig. 5, end cap 24 includes a circular recess or trough 85 therein. Trough 85 is sized and configured to receive and sealingly engage bead 70. Trough 85 should be sized, relative to bead 70, such that when element 21 is pressed against base 63, bead 70 is pushed into trough 85 to form a seal therewith, capable of holding a pressure differential of up to about 2-4 inches of H<sub>2</sub>O. This could be readily accomplished by forming the related region 86 of end cap 24 of an appropriately soft compressible polymeric material into which rigid bead 70 can be pressed, for engagement.

Referring to Figs. 5 and 6, it is noted that for the preferred embodiment depicted surface 90 of end cap 24 is recessed from outer edge 91 to region 92, so that a space between surface 90 and end surface 69 is provided, when filter element 21 is operatively positioned within can 4. The amount of recess can be varied, depending upon the size of the arrangement. In general, an angle of inclination from edge 91 to region 92 on the order of about 1° to 3° will be sufficient.

Advantages which result from this inclination, will be apparent from further descriptions herein below. In general, the space between surface 90 and end surface 69 ensures that there will not be interference with easy formation of the annular, radial, seal.

Still referring to Figs. 5 and 6, internal surface 94 of end cap 24 is configured to slope downwardly, when the assembly 1 is oriented as shown in Figs. 5 and 6,

in extension from outer region 95 toward central aperture 96. Preferably, internal surface 95 is conical or funnel shaped in this region. Thus, any water which collects on internal surface 94 will tend to flow toward central aperture 96 and therethrough, into recessed pan 71.

In some embodiments, recessed radial troughs extending outwardly and upwardly from central aperture 96 can be used to facilitate this flow. Such an arrangement is shown, for example, in Fig. 7 (a top plan view of element 21) wherein four evenly (radially) spaced, recessed, troughs 99 are depicted. It will be understood that each of troughs 99 generally inclines downwardly as it extends from region 95 toward central aperture 96, to facilitate collection of water within interior 35 and direction of the collected water to central aperture 96. An advantage to troughs 99 is that should a leaf or other large particulate material become positioned over central aperture 96, water can still flow into and through the aperture 96 by means of the troughs 99, since the troughs 99 can generally direct water flow underneath debris collected on top of internal surface 94.

Numerous advantages result from the preferred features described. As assembly 1 is used for a filtering operation, air will generally flow through inlet tube 14 into interior 35, carrying within it moisture and/or debris. The moisture and debris will tend to collect within interior 35, on internal surface 94 of end cap 24, since arrangement 1 will generally be configured with end

cap 24 positioned beneath inlet tube 14. Water collecting on internal surface 95 will generally be directed toward central aperture 96, for drainage into recessed pan 71 and eventually drainage outwardly from assembly 1 through drainage aperture 18. Evacuation valve 19, if used, will facilitate this.

Because sealing between end cap 24 and housing 2 is positioned along annular circular sealing surface 67, i.e., at region 77, the critical sealing is not located at a surface where debris is likely to be spread or collect, as element 21 is removed from and replaced into housing 2, during typical maintenance operations.

Because surface 90 is recessed from end surface 69, in extension between edge 91 and region 92, any debris which may spread along end surface 69 during operations involving removal and insertion of filter elements into housing 2, will not likely interfere with sufficient insertion of the element 21 into can 4 for the development of a good seal at region 77. That is, some debris buildup along the bottom of base 63 is well tolerated.

Also, secondary seal 80 will inhibit the likelihood of debris or moisture moving from pan 71 into surface 69, or region 77. This will also help facilitate removal of moisture from assembly 1, since the moisture will tend to concentrate near drainage aperture 18.

In Fig. 6, the arrangement of Fig. 5 is shown exploded. From this, a preferred configuration for

surface 75, relative to circular (annular) sealing surface 67 will be understood. In particular, surface 75 includes steps 101, 102 and 103, with extensions 105 and 106 therebetween. Step 103 is approximately the same diameter as circular sealing surface 67, and facilitates guidance of air cleaner element 21 into engagement with base 63, during assembly. Step 102 is preferably slightly larger in diameter than circular sealing surface 67, and step 101 is preferably slightly larger in diameter than step 102, to enhance compression of end cap material in region 77, as element 21 is inserted into base 63, during assembly. In this manner, a good seal is formed. In general, for preferred embodiments the actual amount of compression of the end cap in region or step 102 is  $3 \text{ mm} \pm 1 \text{ mm}$  on diameter (or  $1.5 \text{ mm}$  at any location). The diameter of step 102 is preferably about  $1.5 \text{ mm}$  greater than step 101, and about  $3 \text{ mm}$  greater than step 103. The amount of compression in step 102 would preferably be about  $21.4\%$  ( $20\% \pm 3\%$ ).

As indicated, the arrangement described with respect to Figs. 1-7 generally utilizes a radial seal engagement in region 77. Alternate sealing arrangements may be utilized. An example of such an arrangement is illustrated in the alternate embodiment of Fig. 8.

In Fig. 8 an alternate application of principles according to the serial no. 08/742,244 disclosure is provided. Fig. 8 illustrates an engagement between an air cleaner assembly base and a filter element, to provide

advantages according to the present invention, in an arrangement which utilizes an "axial seal" between the filter element and the housing, at least at this location.

In general, an axial seal is a seal which is maintained by forces directed along an axis of the filter element, as opposed to radial seal arrangements described with respect to Figs. 1-7 which use forces directed radially around an axis. Axial seal arrangements have been widely utilized in filter elements in a variety of manners. Often a central yoke or axle is provided, along which forces are directed between the housing in the element. In other systems a bolt engagement between portions of the housing are used to compress the element against one end or both ends of the housing. The O-ring 54 in the embodiment of Figs. 1-7, for example, provides sealing by axial compression.

Fig. 8 is a fragmentary cross-sectional view of an alternate air cleaner assembly 115. The air cleaner assembly 115 is also a reverse flow arrangement. Assembly 115 includes housing 116 and air filter element 117. An inlet arrangement, not depicted, would be utilized to direct air flow into interior 118. Air flow would then be through filter element 117 into clean air plenum 120, and outwardly through a conventional outlet, not shown, into an air intake for an engine.

In Fig. 8 the outer wall of the housing 116 or can, is generally shown at 121. The housing end or base



123 is configured to perform functions generally analogous to those for base 63, Figs. 1-7.

Still referring to Fig. 8, filter element 117 has a sheet metal end cap, such as end cap 125. The filter  
5 element 117 includes filter media 126 potted within the end cap 125 (the opposite end cap not being shown in Fig. 8). Element 117 includes inner and outer liners 127 and 128 respectively.

Sealing between element 117 and base 123, against  
10 air flow therebetween, is provided by gasket 130. That is, an appropriate mechanism to apply axial forces in the direction of arrow 131 against element 117 should be provided, to compress gasket 130 between end cap 125 and base 123 and form a seal. This can be accomplished with  
15 bolts used to drive an end cover or inlet construction against an opposite end of element 117. Preferably appropriate sizes and configurations of the element 117, base 123 and gasket 130 are selected, so that the seal of gasket 130 will be sufficient to hold a pressure  
20 differential at least about 40 inches of H<sub>2</sub>O thereacross. In this manner, unfiltered air in region 132 is prevented from reaching clean air plenum 120, in use.

In general, the features of the preferred base 123 depicted are as follows. Base 123 is radially  
25 symmetric and includes outer flange 135, for securement to can wall 121, such as by welding. Base or recess area 136 is provided for a receipt of gasket 130 therein, during sealing. This is accommodated by recessed area 136 forming

a trough 137. Region 138, of base 123, is raised above  
trough 137, and provides a raised surface 139 for provision  
of a secondary seal, as described below. Base 123 then  
defines pan 145, by downwardly extending or declining wall  
5 146, towards a recessed central aperture 147.

With respect to the filter element, end cap 125  
includes a downwardly slanted surface 149 toward central  
pan 150 having drainage aperture 151 therein.

A secondary seal between end cap 125 and surface  
10 139 is provided by secondary seal gasket 155. This gasket  
155 is intended to inhibit the migration of moisture and  
debris from recessed pan 145 into region 137, whereat it  
could interfere with seal gasket 130. Secondary gasket 155  
need only provide a seal sufficient to inhibit substantial  
15 migration of moisture and debris, and does not need to be a  
primary air seal. Thus, gasket 155 need only be compressed  
sufficiently to withstand a pressure differential of up to  
about 2-4 inches of H<sub>2</sub>O thereacross.

Operation of assembly 115 will now be apparent.  
20 When assembled, sufficient axial pressure is applied along  
the direction of arrow 131, to provide an air seal end at  
gasket 130 and a secondary seal at gasket 155. Debris and  
moisture directed into interior 118 will generally collect  
in pan 150. In general, moisture collecting along recessed  
25 surfaces 149 will be directed downwardly toward and through  
aperture 151, into pan 145 of base 123, and eventually  
through drainage aperture 147 and outwardly from assembly  
115. It will be understood that a trough system (analogous

to that described for Figs. 1-7) may be utilized in pan 150, if desired, to inhibit the likelihood of drainage aperture 151 becoming closed or plugged by debris.

5 **Materials Described in Serial No. 08/742,244**

According to Serial No. 08/742,244, while a wide variety of materials may be utilized in the constructions, the principles described were particularly developed for use, to advantage, with systems constructed from certain 10 preferred materials. In general, the constructions were designed for utilization with sheet metal housing systems, or stainless steel housing systems; i.e., arrangements wherein the housing, in particular the inlet assembly, the can and the base, are formed from sheet metal or stainless 15 steel parts which are secured to one another as by welding.

Materials useful for such fabrication include 0.075-0.025 (incorrectly stated as 0.75-0.25 in the earlier disclosures) inches thick stainless steel or sheet metal, although other thickness are useable. Plastics can also be 20 used.

For the arrangement of Figs. 1-7, the preferred end cap material described in serial no. 08/742,244 for forming the regions in the end cap that need to be compressed to form a seal is a soft polymeric material such 25 as foamed polyurethane. Such materials include the following polyurethane, processed to an end product having an as molded density of 14-22 pounds per cubic foot ( $\text{lbs/ft}^3$ ).

The preferred polyurethane described in serial no. 08/742,244 comprises a material made with I35453R resin and I3050U isocyanate. The materials should be mixed in a mix ratio of 100 parts I35453 resin to 36.2 parts I3050U isocyanate (by weight). The specific gravity of the resin is 1.04 (8.7 lbs/gallon) and for the isocyanate it is 1.20 (10 lbs/gallon). The materials are typically mixed with a high dynamic shear mixer. The component temperatures should be 70-95°F. The mold temperatures should be 115-10 135°F.

The resin material I35453R has the following description:

- (a) Average molecular weight
  - 1) Base polyether polyol = 500-15,000
  - 2) Diols = 60-10,000
  - 3) Triols = 500-15,000
- (b) Average functionality
  - 1) total system = 1.5-3.2
- (c) Hydroxyl number
  - 1) total systems = 100-300
- (d) Catalysts
  - 1) amine = Air Products 0.1-3.0 PPH
  - 2) tin = Witco 0.01-0.5 PPH
- (e) Surfactants
  - 1) total system = 0.1-2.0 PPH
- (f) Water
  - 1) total system = 0.03-3.0 PPH
- (g) Pigments/dyes

- 1) total system = 1-5% carbon black
- (h) Blowing agent
  - 1) 0.1-6.0% HFC 134A.

5           The I3050U isocyanate description is as follows:

- (a) NCO content - 22.4-23.4 wt%
- (b) Viscosity, cps at 25°C = 600-800
- (c) Density = 1.21 g/cm<sup>3</sup> at 25°C
- (d) Initial boiling pt. - 190°C at 5mm Hg
- 10       (e) Vapor pressure = 0.0002 Hg at 25°C
- (f) Appearance - colorless liquid
- (g) Flash point (Densky-Martins closed cup) =  
200°C.

          The materials I35453R and I3050U are available  
15 from BASF Corporation, Wyandotte, Michigan 48192.

          For the arrangement shown in Fig. 8, the filter  
element includes sheet metal end caps with a fluted filter  
paper media element potted therein. Conventional  
arrangements such as potted in plastisol may be used.

20

**Dimensions of a Typical Embodiment**  
**Described in Serial No. 08/742,244**

          Consider an air cleaner arrangement such as  
depicted in Fig. 1 used on a over the highway truck (heavy  
25 duty truck). The housing would be about 13-15 inches in  
diameter and about 32 inches long. The element would be  
about 11-13 inches in diameter and about 23-26 inches long.  
The I.D. of the smallest rib on the sealing portion of the

end cap with the inlet tube (prior to compression) would be about 6.78-7.44 inches. The I.D. of the annular surface in the housing base whereat the radial seal with second end cap occurs would be about 11.28-12.94 (incorrectly stated as 19.94 in serial no. 08/742,244) inches. The O.D. of the largest step on the second end cap, for sealing with the base, would be about 11.4-13.06 inches. The bead on the base for engagement with the second end cap would be large enough to extend into the trough on the end cap about 0.35 inches. The declination angle in the second end cap from its outer rim to the recess engaging the bead would be about  $1.75^{\circ}$ . The declination angle on the inside of the second end cap would be about  $4^{\circ} \pm 2^{\circ}$ .

15

**Description Added to Disclosure of**  
**Serial No. 08/742,244**

It is first noted that there has been developed a preference for application of the techniques described in Serial No. 08/742,244 since the time of filing of that application. In particular, it is desirable, when molding end cap 24, to provide for a media stand-off to ensure that the media 25 is supported above a remaining portion of a bottom surface of the mold, when the molding occurs. The mold can be provided with a circular, raised, media stand-off positioned in a portion of the mold underneath the media 25, during molding, to provide for this. The end cap 24 would, in general, show an indent ring corresponding to

the mold stand-off, at a location aligned with media 25, as a result of this.

Also, hereinbelow a preferred material for use with the embodiment of Figs. 9-15, as the urethane material, is provided. Such a preferred material and processes for its use, may also be used with the embodiment of Figs. 1-7, for both end caps.

It is also noted that the specific overall depiction of Figs. 9, 10, 11, 12, 13, 14 and 15 included herein, were not part of the disclosure of serial no. 08/742,244. Description related to them, has been added.

Figs. 9-15 concern a variation in which the "closed" end cap having the drainage aperture therein, while it comprises polymeric material into which the ends of the inner and outer supports or liners and media are potted, further comprises a composite of polymeric material and a pre-formed insert. (By "pre-formed" in this context, reference is made to the fact that the insert was formed before a remainder of the end cap was molded.) As a result of a preferred embodiment for achieving this, shown in Figs. 9-15, the inner surface of this end cap (which comprises the drainage surface to the aperture), is physically an inner surface of the end cap insert. This too will be understood by reference to Figs. 9-15 and the descriptions hereinbelow.

A principal difference for the embodiment of Figs. 9-14, from the embodiment of Figs. 1-7, concerns the referenced insert and the specifically recited composite

nature of the closed end cap having the drainage aperture therein. There are, however, some further modifications in an exterior surface of the insert. These too will be described in connection with Figs. 9-15.

5                   Attention is first directed to Fig. 9. Fig. 9 is a fragmentary cross-sectional view of an assembly according to this alternate embodiment of the present invention. Referring to Fig. 9, assembly 201 comprises a combination of can 204 and element 221. In Fig. 9, reference  
10 numeral 260 generally designates an end of can wall 261. Within end 260 is positioned a cover or base 263 of can 204. Can 204, including base 263, is configured analogously to can 4 and base 63 of Fig. 5, and thus includes, analogously: a configuration which is preferably  
15 radially symmetric around a central axis 233; end flange 265; center 266; sealing surface 267; bend or corner 268; end surface 269; secondary seal bead or ridge 270; end recess 271; and, in center 266, a drainage aperture 218. Positioned within aperture 218, is evacuation  
20 valve 219.

                  Still referring to Fig. 9, filter element 221 includes end cap 224 thereon. End cap 224 comprises an appropriate material, and is of appropriate size, so that when it is pushed into and against base 263, an outer  
25 circumferential surface 275 of the end cap 224 engages surface 267 of base 263 in a sealing manner. That is, an annular seal 276 is formed in region 277, circumferentially around end cap 224. As with the embodiment of Fig. 5, this



is facilitated by preferably providing surface 267 in a cylindrical configuration extending generally parallel to axis 233. As a result of the circumferential seal 276, sealing against flow of air is not required between any other portions of filter element 221 and base 263. A secondary seal 280, analogous to seal 80, Fig. 5, is provided, however, between end cap 224 and base 263. The secondary seal 280 inhibits movement of debris or water into region 281, between element 221 and base 263.

10 It is noted that the particular configuration of outer circumferential seal surface 275 of end cap 224, for the arrangement shown in Fig. 9, differs from the analogous surface 67 in the embodiment of Fig. 5. A preferred configuration for surface 267 (and surface 67 if applied in 15 the embodiment of Fig. 1) is described hereinbelow in connection with the mold Fig. 13.

Still referring to Fig. 9, end cap 224 includes a circular recess or trough 285 therein. Trough 285, analogously to trough 85, Fig. 5, is sized and configured 20 to receive and sealingly engage bead 270. Trough 285, which, in the preferred embodiment depicted has somewhat of an inverted "V" configuration (with a rounded apex) when viewed in cross-section, should be sized, relative to bead 270, such that when element 221 is pressed against 25 base 263, bead 270 is pushed into trough 285 to form a seal therewith, capable of holding a pressure differential at least up to about 2-4 inches of H<sub>2</sub>O.

Analogously to end cap 24 of the arrangement shown in Fig. 5, end cap 224 comprises a soft, polymeric material. However, unlike end cap 24 shown specifically in Fig. 5, end cap 224 is a composite. In particular, end cap 224 comprises: section 399 of compressible, polymeric material 400; and, insert 401. Advantages which result from the provision of the insert 401, as part of the end cap 224, will be apparent from further descriptions hereinbelow.

10           A more detailed description of the manner of construction, to provide insert 401, is also provided hereinbelow. In general, the insert 401 is secured to the "filter pack" which would typically comprise media 225 (which is pleated paper in the preferred embodiment shown),  
15 inner support 226, and outer support 227. Supports 226 and 227 could comprise, for example, conventional perforated metal or expanded metal media liners. Inner liner 226 defines inner chamber 235 (which is cylindrical in the preferred embodiment shown). During assembly, after the  
20 filter pack comprising the liners 226, 227 and media 225 is prepared, insert 401 would be positioned in one end of that filter pack, closing an end 235a of chamber 235. The assembly comprising a filter pack and insert would then be potted within the polymeric material which is then cured to  
25 form material 400, Fig. 9. In a typical operation, this potting would be achieved by positioning the filter pack and insert 401 in an appropriate mold and distributing within the mold the uncured polymeric material, which is

then cured. As a result of the process, again described in more detail below, the insert 401 becomes permanently embedded within the material 400, to become secured within the filter element 221 (between material 400 and liner 226) as a part of the composite end cap 224. In the final product, region 400 covers an underside of insert 401, except in some instances for selected portions as described below.

Attention is now directed to Figs. 10 and 11 in which the details of the preferred insert 401 are depicted in detail, and from which advantages which result from utilization of the insert 401 can be understood. Referring first to Fig. 10, which is a top plan view of the insert 401, the insert 401 has an outer perimeter 410 (circular in the preferred embodiment shown) with depending legs 411. The specific insert 401 depicted in Fig. 10 includes twelve evenly radially (i.e., separated radially by 30°) spaced legs 411, each of which terminates in a foot 412. Of course, alternate numbers and specific configurations of legs 411 and feet 412 may be used.

In general, insert 401 includes an upper surface 415, Fig. 10, and an opposite, bottom surface or lower surface 416, Fig. 11.

In general, upper surface 415 of insert 401 will, when element 221 is assembled, generally comprise the inner surface of composite end cap 224. Thus, surface 415 will include thereon the inner drainage surface for directing fluid to central aperture 296 in element 224.

Referring to Fig. 11, insert 401 includes, on surface 415, an apex or upper ridge 420. Ridge 420 is preferably a perimeter ridge, and is circular. Preferably surface 415 includes funnel section 421 therein, tapering downwardly from apex or ridge 420 to central drainage aperture 422. A downward taper of 2 to 6°, typically 4°, will be preferred. Aperture 422 forms drainage aperture 296, Fig. 9, in element 221. As with aperture 96, Fig. 5, aperture 422 is substantially smaller in internal dimension, i.e., diameter if round, than an internal dimension (diameter) of internal volume 235. Preferably, as with aperture 296, aperture 422 is circular, having a diameter within a range of about 0.12-1 inch, typically about 0.47 inches, whereas an internal diameter of inner liner 226 is typically 6-8.5 inches, typically, 6.02, 7.78, or 8.43 inches.

Referring again to Fig. 10, insert 401 includes standing ribs or ridges 425. The ridges 425 are directed generally from outer perimeter 410 toward aperture 422. No ridge 425, however, extends completely to aperture 422, in the preferred embodiment shown.

Also in the preferred embodiment shown, ridges 425 form pairs comprising two sets of channels or troughs: troughs 428, of which there are four depicted in the preferred embodiment; and, troughs 429, of which there are also four in the preferred embodiment shown. For the preferred embodiment shown, troughs 428 are identical to one another, and are separated radially by 90°.

Troughs 429 are also identical to one another and are separated radially by 90°. Each one of troughs 429 is evenly spaced between two adjacent ones of troughs 428. Each of troughs 429 and 428 comprises a pair of ridges 425.

5           Troughs 428 differ from troughs 429 in that troughs 428 are longer; that is, troughs 428 extend a greater percentage of the distance toward aperture 422 from perimeter ridge 420. Troughs 429 are shorter (in elongated extension), primarily in order to leave open spaces 431 for  
10 liquid flow on surface 415 toward aperture 422.

Between the ridges 425 defining any given trough, 428, 429, an aperture hole through insert 401 is provided. Thus, there are two sets of apertures: apertures 433 in troughs 428; and, apertures 434 in troughs 429.

15 Apertures 433 and 434 are generally oval-shaped, and act as free rise apertures to allow for free rise of polymeric material 400 therethrough, during the molding process. This helps secure the insert 401 as part of the composite end cap 224. It also facilitates a controlled molding  
20 process, as described below. The ridges 425 help contain the rising polymeric material 400, during the molding process, in part to maintain substantial portions of surface 415 open, for free fluid flow thereacross.

Note that as a result of the ridges 425 being  
25 raised above surface 415, improvement in liquid flow across surface 415 is provided. This is in part because leaf material, paper material, etc., which settles into

element 221 may, at least in some instances, be supported above surface 415 by the ridges 425.

Attention is now directed to Fig. 11. From Fig. 11, it can be understood that depending legs 411 generally bow outwardly from ridge 420, depending from surface 416. Preferably, each leg 411 is about 0.625 inches long in extension between ridge 420 to the bottom tip of beads 440, Fig. 11.

Preferably an outer radius defined by the perimeter of the legs at regions 430, is slightly larger than the inner dimension (diameter) of liner 235; and, legs 411 are sufficiently thin to flex inwardly somewhat, when pressed into an end of inner liner 235, during assembly. This "spring" effect can be used to temporarily secure insert 401 to liner 235 in the filter pack, during the molding operation, as described below. Preferably, the outer radius of the legs at regions 430 is about 0.25 inches.

Each leg 411 extends slightly outwardly from the vertical. This is to help facilitate manufacturing of the insert 401, so that it may be more easily pulled from its mold. Preferably, each leg 411 extends at an angle of about 5° from vertical.

Each leg 411 includes a tapered rib 413 extending therefrom. Each rib 413 extends from just above an upper surface 441 of each foot 412 to just below the radiussed surface 430. Ribs 413 help to temporarily secure insert 401 to liner 235 in the filter pack, during the

molding operation, as described below. Preferably, each rib 413 is about 60 thousandths of inch thick, and extends a length of about 0.3 inches. Each rib 413 extends about 1° from vertical.

5                    Still referring to Fig. 11, each foot 412 includes a bottom bead 440 thereon. The bottom bead 440 operates as a mold stand-off, during molding. In particular, bottom beads 440 will support a remainder of insert 401 above a lower surface of a mold, during a  
10 molding operation, to help ensure that a remainder of insert 401 will be embedded within the resin, during the molding operation. After molding, beads 440 will either be slightly exposed in the molded end cap, or they will be covered by a thin layer of molded material, depending upon  
15 the molding operation. Either condition is acceptable. Preferably, each bead 440 extends at a radius of about 0.06 inches.

Each foot also includes an upper surface 441. The upper surface is preferably at least 0.375 inches long,  
20 and, during assembly, will extend beyond the filter pack inner liner 235 to positions underneath the filter media 225. As a result of being positioned underneath the filter media 225 during assembly with a filter pack, upper surfaces 441 of the feet 412 will operate as media stand-  
25 offs, during molding. This will prevent the media 225 from dropping all the way to the bottom of the mold cavity.

Still referring to Fig. 11, attention is directed to a portion of surface 416 which circumscribes

aperture 422. That portion or region is indicated generally at reference numeral 450. Within this region is located a circular trench 451. (Circular when viewed in bottom plan view.) The circular trench 451 preferably has a semi-circular cross-section as shown in Fig. 11, although alternative configurations can be used. During the molding operation, trench 451 will be aligned with, and receive, a bead in the mold. This will inhibit, during molding, flow of resin along the direction indicated generally by arrows 452, past surface 450 and into aperture 422. The result will be an inhibition of polymeric flash at, or in, aperture 422.

As a result, it is anticipated that after a molding operation, certain portions of surface 450, indicated generally at 455 between trough 451 and aperture 422, will generally be exposed, except perhaps for some small amount of flash from the molding operation. The exposed surface 455 is viewable in Fig. 14, a bottom plan view of element 221.

Advantages to a composite end cap 224 including an insert such as that shown in Figs. 10 and 11, result from at least two related concerns. First, it is anticipated that insert 401 will typically be manufactured from a material that can be molded, for example a molded, rigid, polystyrene or similar material. As a result of such a molding, specific configurations can be readily provided to surface 415 to achieve advantageous fluid flow effects and similar effects without relying upon control of



conditions used to mold material 399, 400. Thus, the surface features of surface 415 are not achieved during the same operation in which the soft, polymeric material for the remainder of end cap 224, i.e., material 400, is  
5 formed.

In addition, the molding process to provide for polymeric material 400 is facilitated. This is because a "closed mold" process is not required. Rather, free rise of the polymeric material 399 is accommodated because  
10 insert 401, including apertures 433 and ridges 425, will control and direct rise. The free rise will not effect the downward slant in regions 421, to achieve a desirable drainage effect in insert 401, since the inner surface 415 of the end cap 224 is pre-formed.

15 In general, when the end cap 424 comprises a composite of an insert 401 and polymeric material 400 as described herein, the polymeric material may comprise the preferred polyurethane described in application serial no. 08/742,244, and previously herein, molded end or similar  
20 conditions.

However, preferably the urethane comprises a material made with Elastofom I36070R resin and Elastofom I3050U isocyanate as described below. The material should be mixed as described above, except with I36070R, replacing  
25 the I35453R resin. For this material, the mold temperature should preferably be about 105°-150°F.

The resin material I36070R has the following:

(a) Average molecular weight

- 1) Base polyether polyol = 500-15,000
  - 2) Diols = 60-10,000
  - 3) Triols = 500-15,000
  - (b) Average functionality
    - 1) total system = 1.5-3.2
  - (c) Hydroxyl number
    - 1) total systems = 100-300
  - (d) Catalysts
    - 1) amine = Air Products 0.1-3.0 PPH
  - (e) Surfactants
    - 1) total system = 0.1-2.0 PPH
  - (f) Water
    - 1) total system = 0.03-3.0 PPH
  - (g) Pigments/dyes
    - 1) total system = 1-5% carbon black
- The Elastofom I3050U isocyanate description is as follows:
- (a) NCO content--22.4-23.4 wt. %
  - (b) Viscosity, cps at 25°C = 600-800
  - (c) Density = 1.21 g/cm<sup>3</sup> at 25°C
  - (d) Initial boiling pt.--190°C at 5 mm Hg
  - (e) Vapor pressure = 0.0002 Hg at 25°C
  - (f) Appearance--colorless liquid
  - (g) Flash point (Densky-Martins closed cup) = 200°C

The materials Elastofom I36070R and Elastofom I3050U are available from BASF Corporation, Wyandotte, Michigan 48192.

Preferably the insert comprises a rigid material, such as molded polystyrene. Of course, a variety of specific configurations and alternatives to the arrangement shown in Figs. 10 and 11 can be used. However, preferred 5 configurations and dimensions are provided herein.

With respect to the liner material, no particular preference is made. In general, it is foreseen that the liner will comprise either perforated metal or expanded metal, for example G60 galvanized steel, having a thickness 10 of about 0.03 inches. Such liners are commonly used in other types of large filter elements for trucks, for example.

As to the filter material, with respect to the principles of the present invention, no particular 15 preference exists. The principles of the present invention can be applied with any of a wide variety of materials. For example, pleated paper or cellulose materials, such as conventionally used in truck filters, may be used. Synthetic materials, or cellulose materials, having 20 synthetic (polymeric or glass) fibers applied thereto, may also be used. Expanded polytetrafluoroethylene layers, applied on a surface, or in composites, may be used. In addition, nonwoven fibrous constructions, or composites of nonwoven fibrous media and pleated media, may also be used. 25 Indeed, arrangements not existing and yet to be developed can be accommodated, by composite end caps made according to the processes described herein. This will be apparent, from a more detailed description of the method of assembly.

In Fig. 12, a schematic representation of a preferred process for manufacturing a filter element according to the composite of Figs. 9, 10 and 11 is provided.

5 Referring to Fig. 12, a filter pack is indicated generally at 500. The filter pack comprises outer liner 227, media 225, and inner liner 226. The filter pack 500 is shown aligned to receive insert 401 therein, with feet 411 positioned under media 225, and with a  
10 remainder of insert 401 positioned within inner chamber 235. The combination of filter pack 500 and insert 401 would then be positioned within mold 501. The appropriate resin mix would be positioned in the mold as well, and cured. Again, free rise conditions for curing  
15 are allowable, due in part to the design of insert 401.

Attention is directed to Fig. 13, which indicates a schematic cross-section of a usable mold 501. Note the mold includes bead 502 for engagement with trough 451 in insert 401, Fig. 11, discussed above. Center post 503 fits  
20 through aperture 422 in insert 401, and ensures a proper positioning as well as inhibition of flash within the aperture 422. Note the positioning of bead 504, which will generate trough 285, Fig. 9. Also note the positioning of stand-off 505, which is formed as a ring in mold 501.  
25 Stand-off 505 will receive beads 440 positioned thereon, during molding. This is illustrated in Fig. 15, schematically, in which insert 401 is shown positioned within mold 501.

**Some Preferred Dimensions for Arrangements According to  
Figs. 9-15**

Consider an air cleaner arrangement such as  
5 depicted in Fig. 1 used on a over the highway truck (heavy  
duty truck). The housing would be about 11-15 inches in  
diameter and about 32 inches long. The element would be  
about 9-13 inches in diameter and about 22-26 inches long.

The I.D. of the smallest rib on the sealing portion of the  
10 end cap with the inlet tube (prior to compression) would be  
about 5.15 inches. The I.D. of the annular surface in the  
housing base whereat the radial seal with second end cap  
occurs would be about 9.52 inches. The O.D. of the largest  
step on the second end cap, for sealing with the base,  
15 would be about 9.64 inches. The bead on the base for  
engagement with the second end cap would be large enough to  
extend into the trough on the end cap about 0.35 inches.  
The declination angle in the second end cap from its outer  
rim to the recess engaging the bead would be about  $1.75^\circ$ .  
20 The declination angle on the inside of the second end cap  
would be about  $4^\circ \pm 2^\circ$ .

The standing ribs or ridges 425 on the insert  
would have a height of about 0.077 inches, and a thickness  
at a distal end (free end) of about 0.042 inches. Each of  
25 the ridges 425 between the base proximate to the regions  
421 and the free end would be curved on a radius of about  
0.062 inches. The distance between a pair of free ends of  
two of the ridges would be about 0.4 inches. Apertures 433

and 434 would have radii at each respective end of about 0.125 inches.

Circular trench 451 would have a semi-circular cross-section. The radius of the cross-section would be about 0.031 inches. The diameter of circular trench 451 would be about 0.736 inches.

The diameter for the insert extending from the outermost end tip of one of the feet to the outermost end tip of a diametrically opposite foot would be about 9.265 10 inches. The diameter of the insert extending from the outermost part of one of the legs (not including the foot) to the outermost part of a diametrically opposite leg (not including the foot) would be about 8.515 inches. The inner radius of each leg 411 as it bends from a top surface of 15 the insert down toward its foot would be about 0.187 inches. The outer radius of each leg 411 as it bends from a top surface of the insert down toward its foot would be about 0.25 inches. The radius of each leg 411 as it bends from its substantially vertically extension to its foot 20 would be about 0.03 inches. The radius of each bead 440 would be about 0.06 inches. The angle of declination at ramp section 453 would be about  $30^\circ$  from horizontal, and on a radius of about 0.125 inches.

Each rib 413 on legs 411 would be about 60 25 thousandths of inch thick, and extend a length of about 0.3 inches. Each rib 413 would extend about  $1^\circ$  from vertical. Each leg 411 would extend at an angle of about  $5^\circ$  from vertical, and be about 0.625 inches long in extension

between ridge 420 to the bottom tip of beads 440. The upper surface of each foot would be about 0.375 inches long.

2025 RELEASE UNDER E.O. 14176

**WHAT IS CLAIMED IS:**

1. An air filter element comprising:
  - (a) first and second, opposite, end caps;
  - (b) filter media;
  - (c) an inner liner defining an open filter interior;
  - (d) said first end cap having an air inlet opening therein;
  - (e) said second end cap having:
    - (i) a central drainage aperture extending therethrough; and,
    - (ii) an interior surface constructed and arranged to direct moisture on said second end cap interior surface to said central drainage aperture.
2. An air filter element according to claim 1 wherein:
  - (a) said second end cap comprises a composite including:
    - (i) an inner insert having a first, inner, surface defining said second cap interior surface and an opposite, second, outer, surface; said inner insert having a central aperture extending therethrough; and,
    - (ii) a compressible polymeric material covering at least a portion of said outer surface of said insert; said inner liner being embedded in said compressible polymeric material; said polymeric material having a central



aperture therein aligned with said aperture in said inner insert, to form said central drainage aperture.

3. A filter element according to claim 2 wherein:
  - (a) said compressible polymeric material comprises a material having an as molded density within the range of 14-22 pounds per cubic foot.
4. A filter element according to claim 3 wherein:
  - (a) said compressible polymeric material comprises polyurethane foam.
5. A filter element according to claim 2 wherein:
  - (a) said inner insert includes a circular trough in said outer surface positioned to extend around said insert central aperture.
6. A filter element according to claim 5 wherein:
  - (a) said insert trough is semi-circular in cross-section.
7. A filter element according to claim 2 wherein:
  - (a) said inner insert includes a plurality of free rise apertures therein; and,
  - (b) a portion of said compressible polymeric material projects through said free rise apertures.

8. A filter element according to claim 7 wherein:
  - (a) each of said free rise apertures is positioned between an associated pair of ridges extending outwardly from said insert first surface.
9. A filter element according to claim 8 wherein:
  - (a) each pair of wall projections comprises first and second, spaced, walls extending along a direction from an outer perimeter of said inner insert toward said central drainage aperture.
10. A filter element according to claim 8 wherein:
  - (a) said inner insert includes a plurality of pairs of wall projections comprising a first set of pairs and a second set of pairs;
    - (i) each pair of said second set of pairs being shorter, in longitudinal extension toward said central drainage aperture, than each pair of said first set of pairs.
11. A filter element according to claim 10 wherein:
  - (a) each pair of said first set of pairs is spaced from each adjacent pair of said first set by a member of said second set of pairs; and,
  - (b) each pair of said second set of pairs is spaced from each adjacent pair of said second set by a member of said first set of pairs.

12. A filter element according to claim 11 wherein:
  - (a) said first set of pairs consists of four pairs of walls;
  - (b) said second set of pairs consists of four pairs of walls; and,
  - (c) each pair of walls is evenly, radially, spaced on said inner insert first surface and around said central drainage aperture.
  
13. A filter element according to claim 12 wherein:
  - (a) said inner insert has an outer periphery with a plurality of spaced legs extending outwardly therefrom:
    - (i) said spaced legs projecting axially outwardly from said inner insert in a direction from said inner insert second side.
  
14. A filter element according to claim 13 wherein:
  - (a) each one of said spaced legs has a radially directed foot thereon; each radially directed foot extending away from an associated leg by a distance of at least 0.375 inches.

Abstract of the Invention

A reverse flow air filter arrangement is provided. The arrangement includes a filter element having 5 first and second end caps, the second end cap having a central drainage aperture. A funnel shape on an interior surface of second end cap is used to direct moisture flow to the drainage aperture. The arrangement includes a housing in which the filter element is positioned, 10 operatively, during use. Certain features in the housing facilitate moisture withdrawal from the filter element while also inhibiting interference with sealing between the filter element and the housing.

15

CERTIFICATE UNDER 37 CFR 1.10:

"Express Mail" mailing label number: EM296798756US

20 Date of Deposit: JUNE 27, 1997

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Assistant Commissioner 25 for Patents, Washington, D.C. 20231.

By: \_\_\_\_\_

Name: NASSUR MOHAMMUD

30

FIG. 1

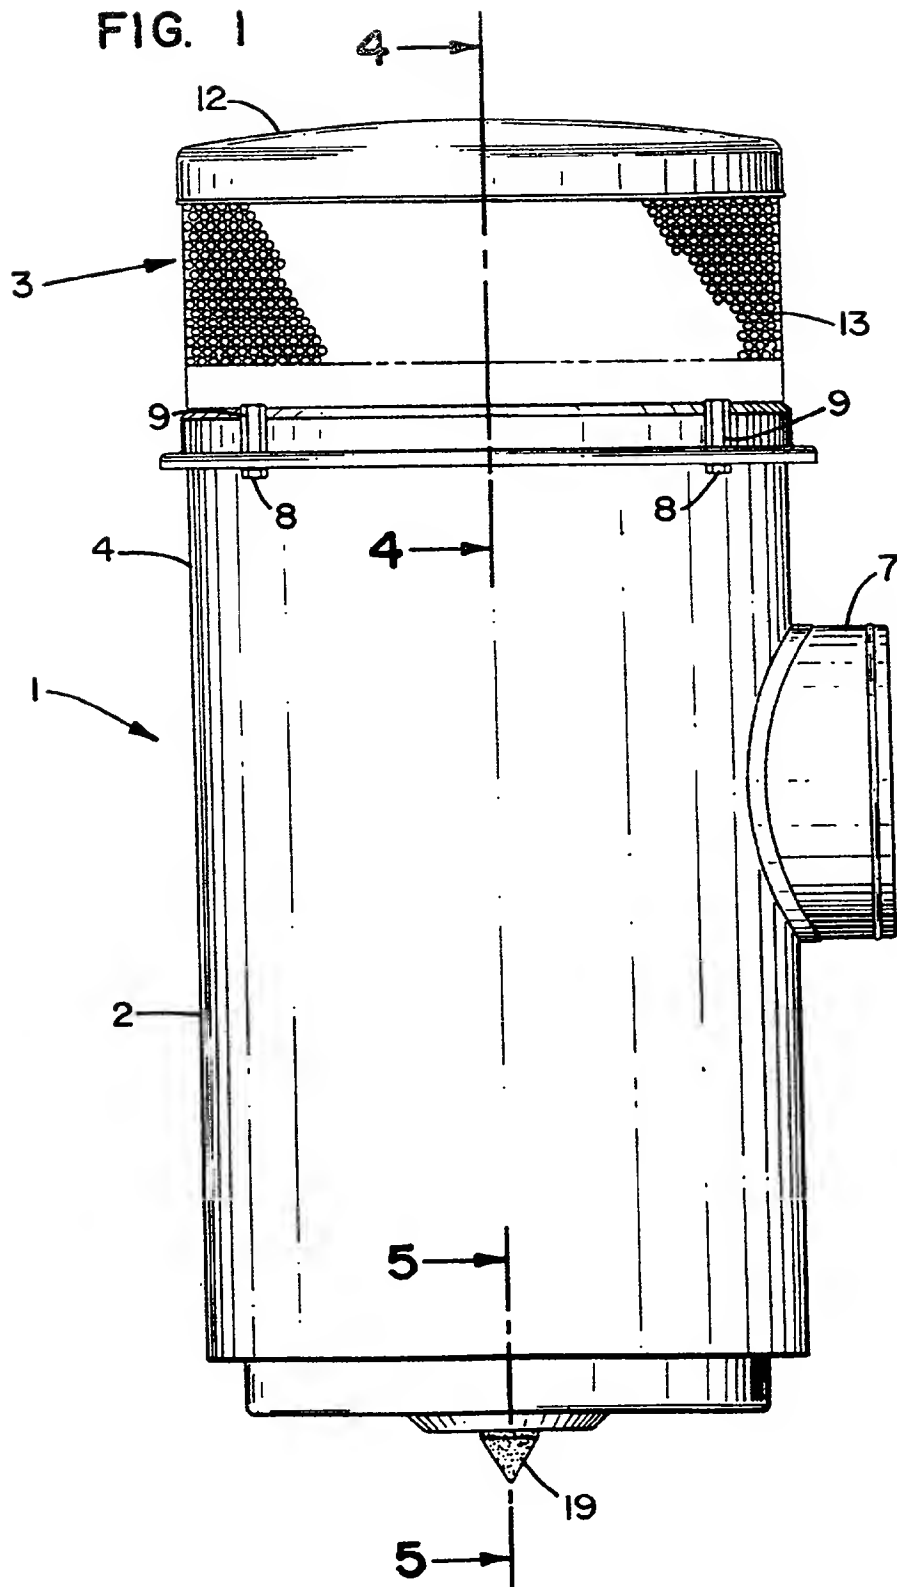


FIG. 2

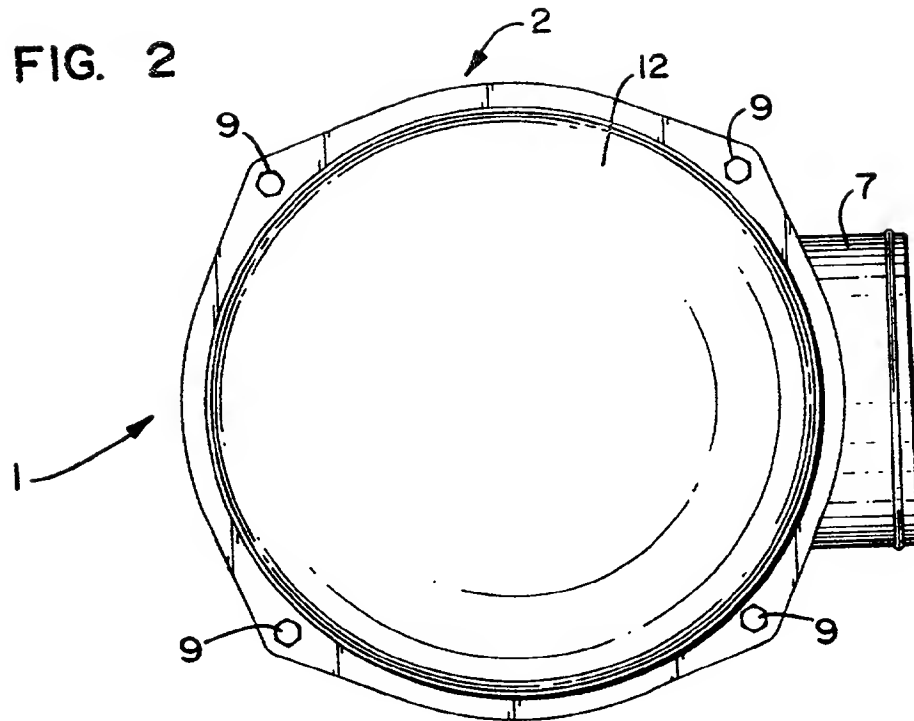


FIG. 4

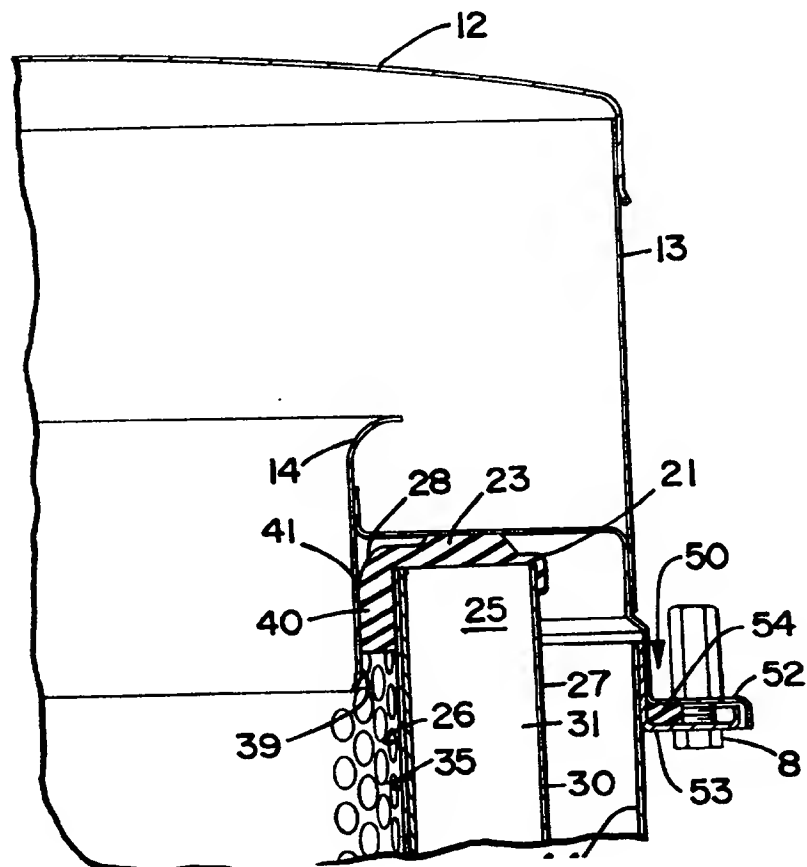
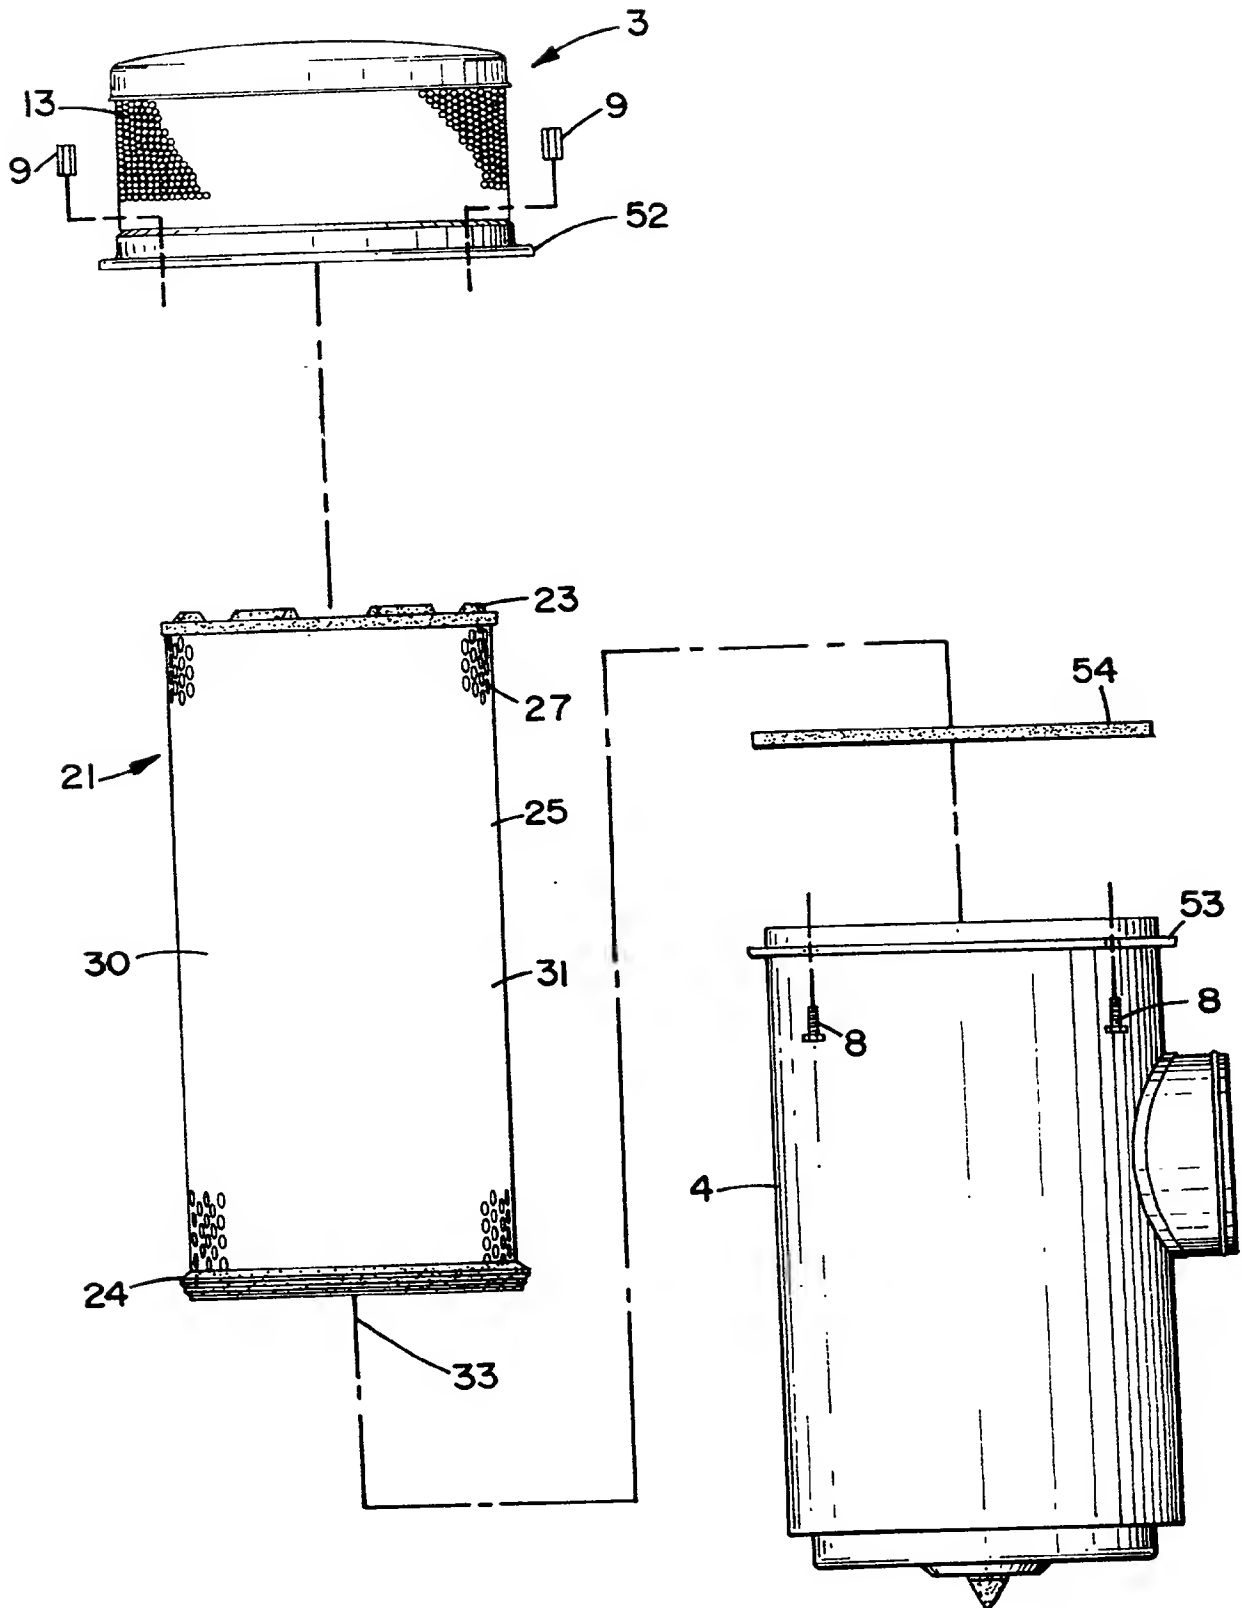
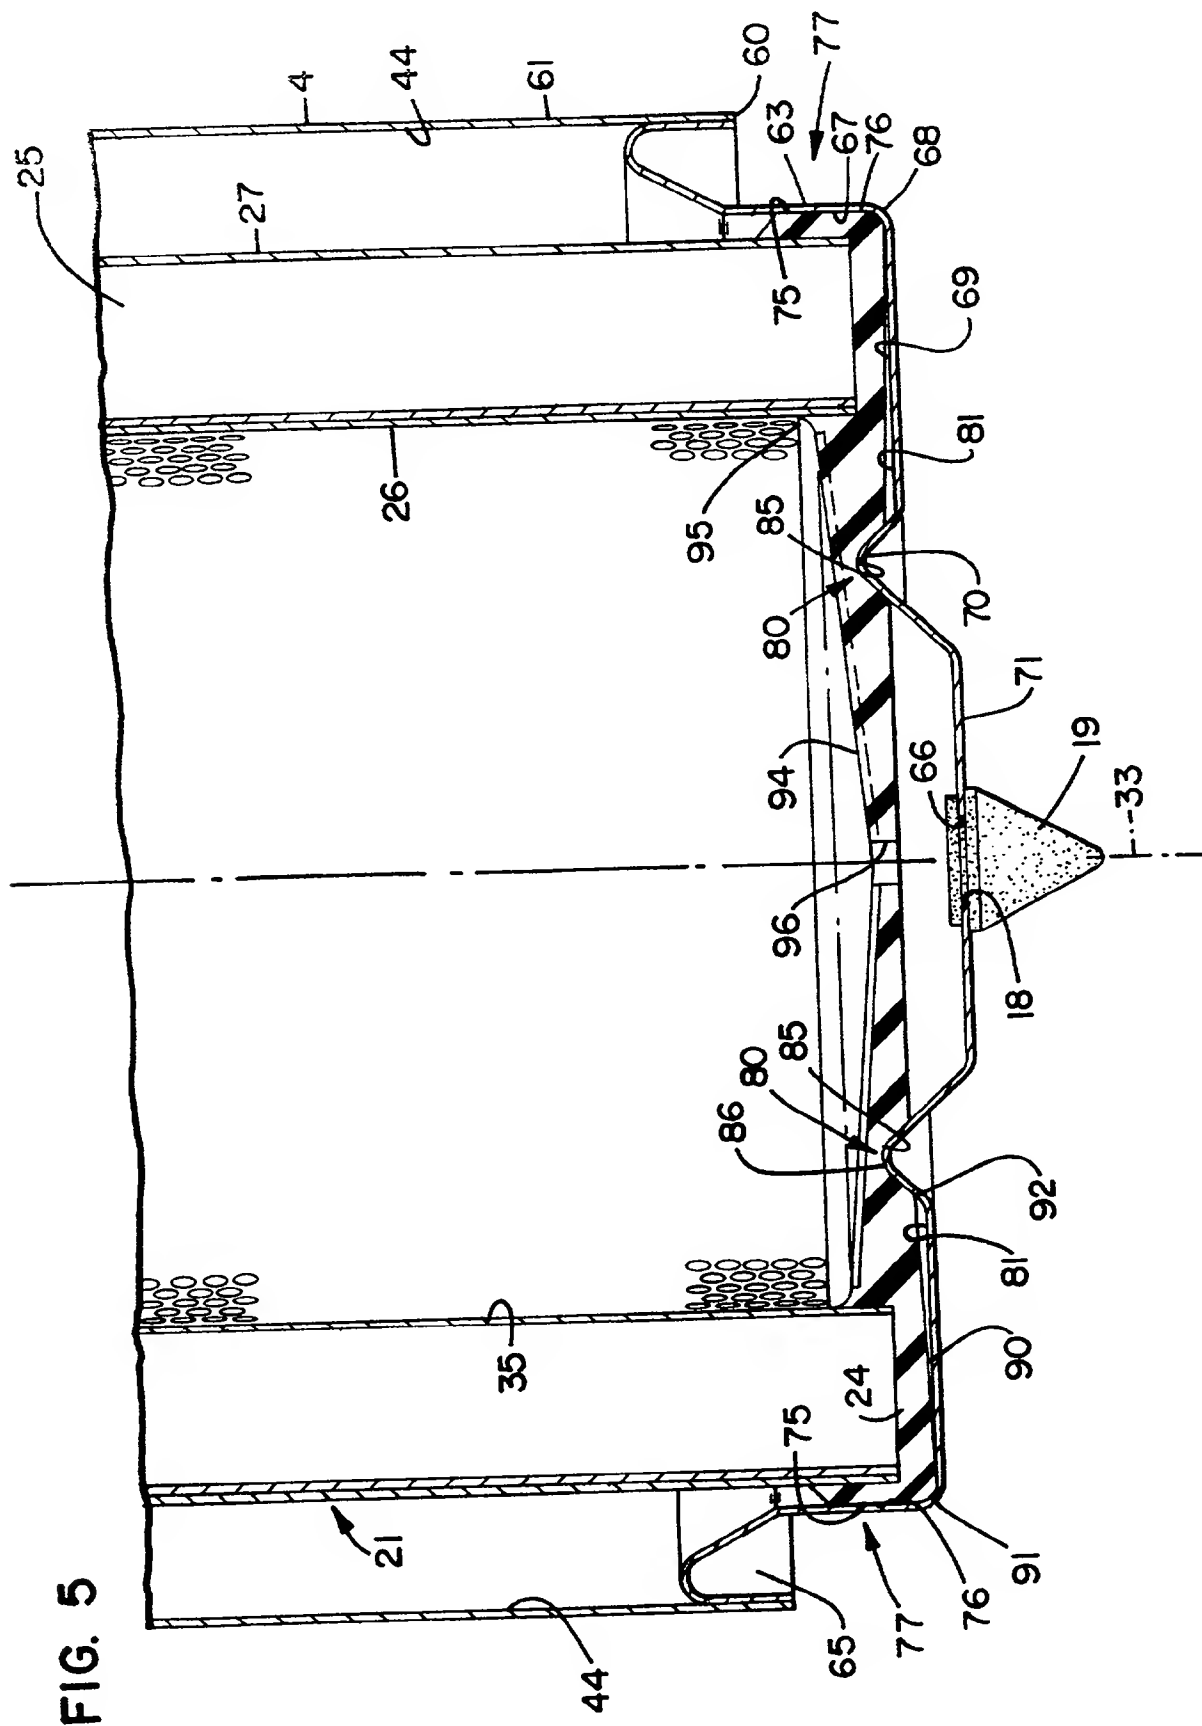


FIG. 3







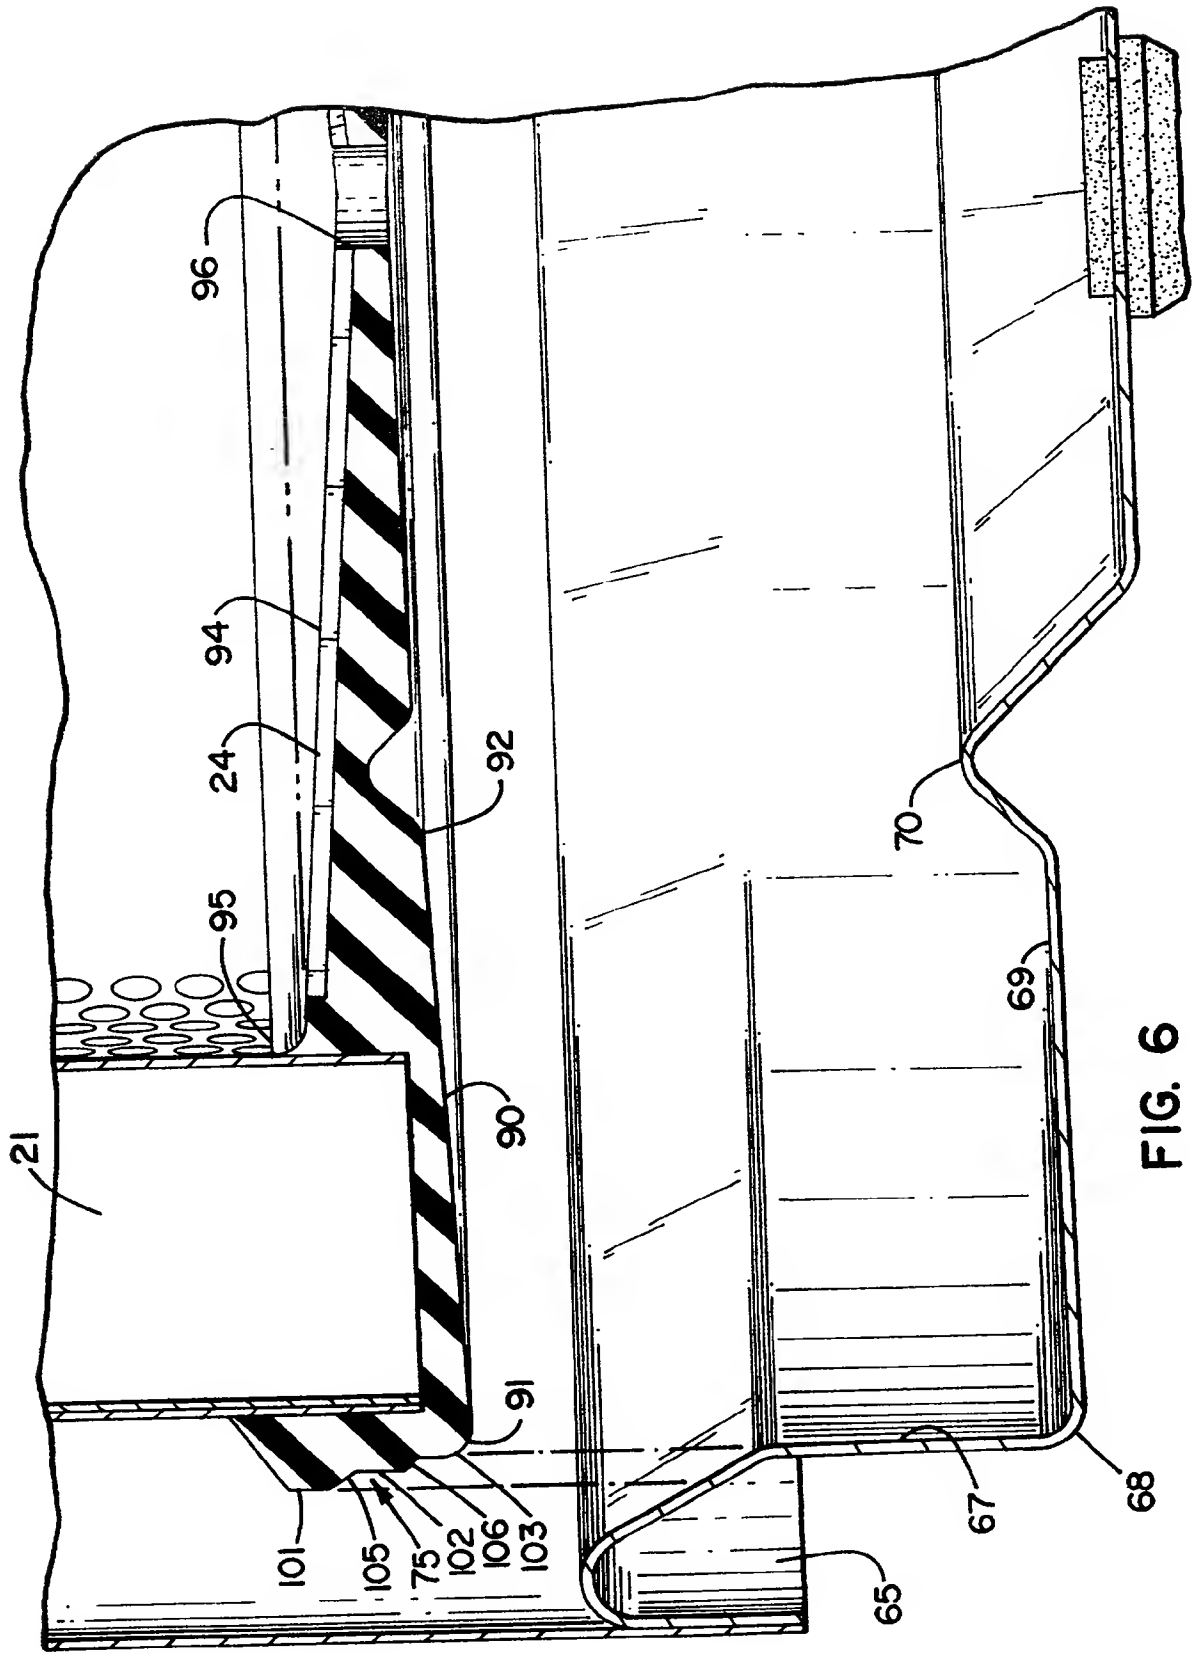


FIG. 6

FIG. 8

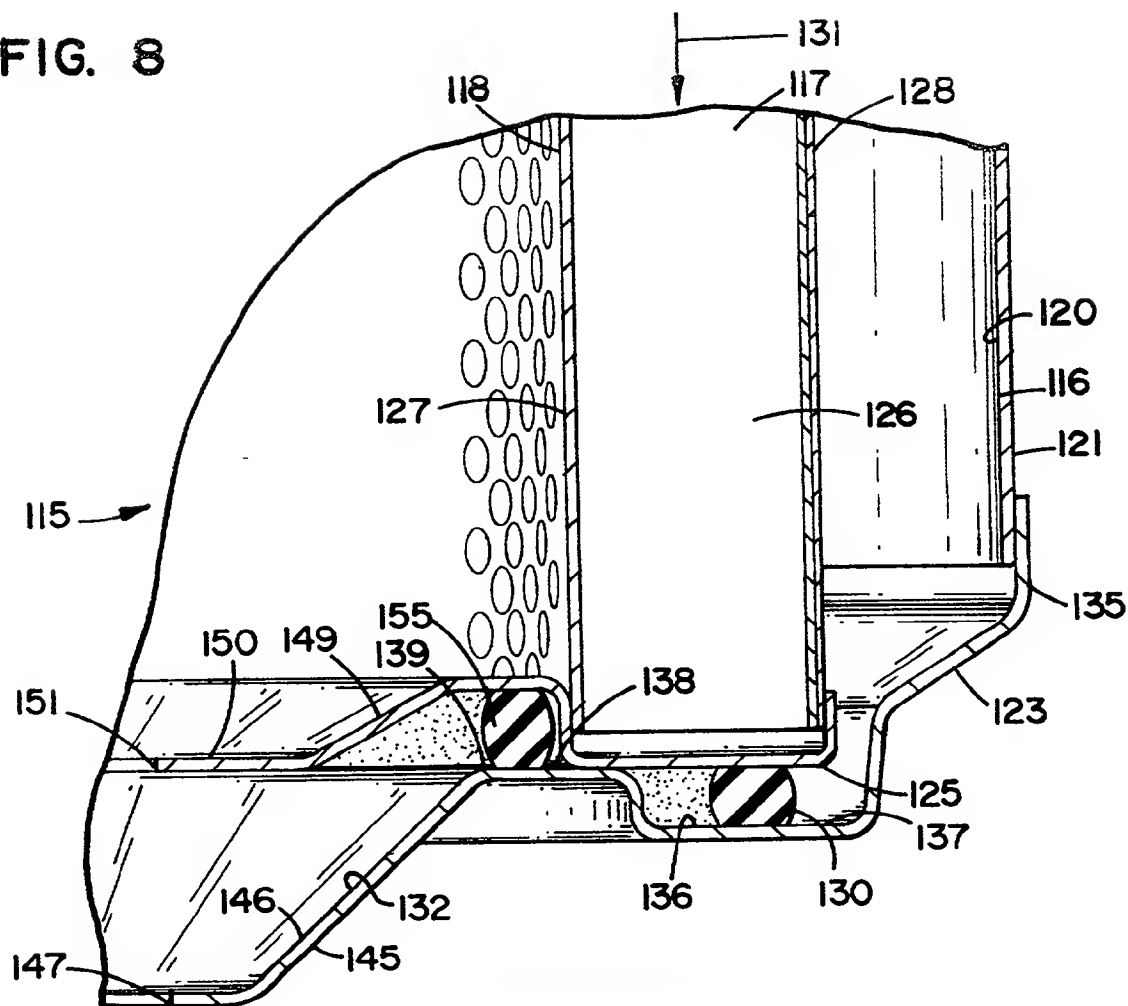
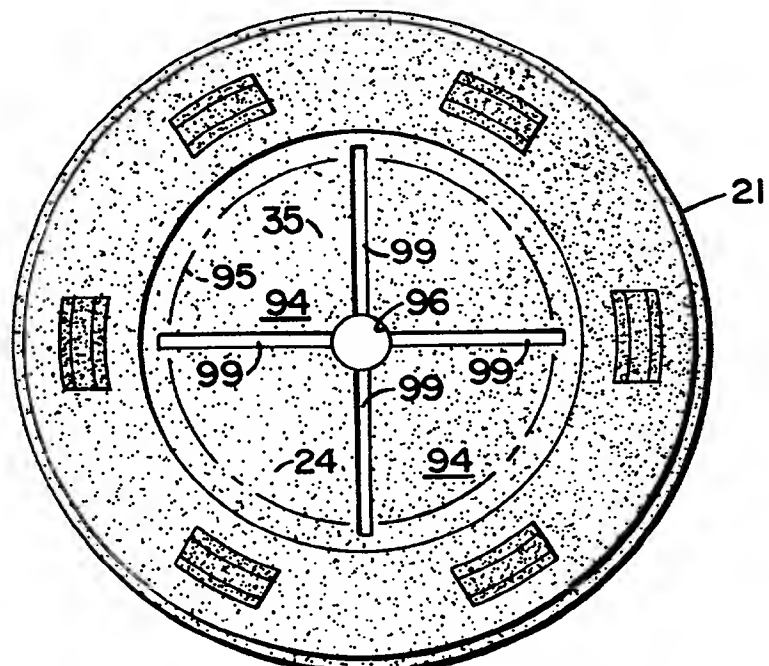
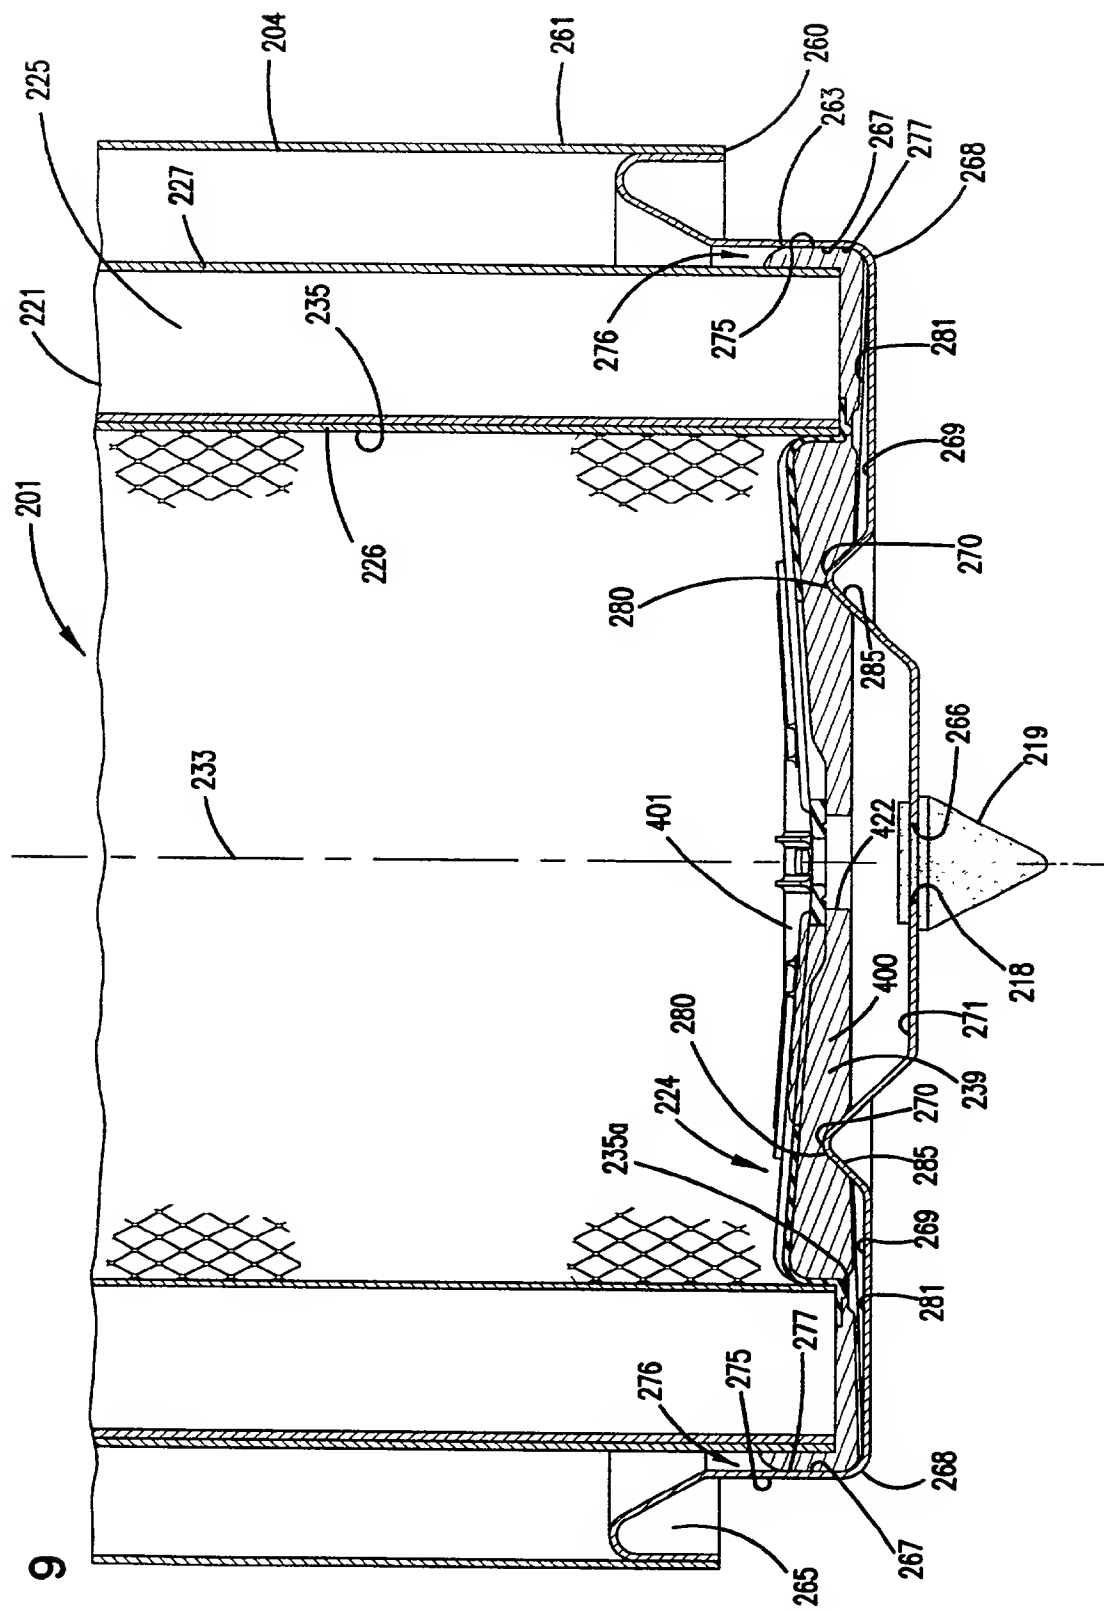


FIG. 7



**FIG. 9**





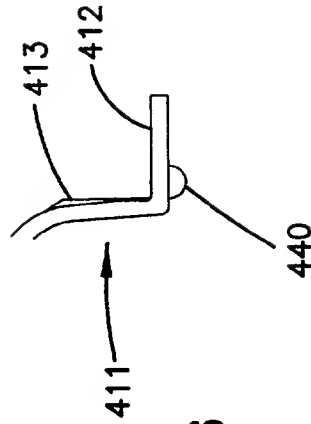


FIG. 16

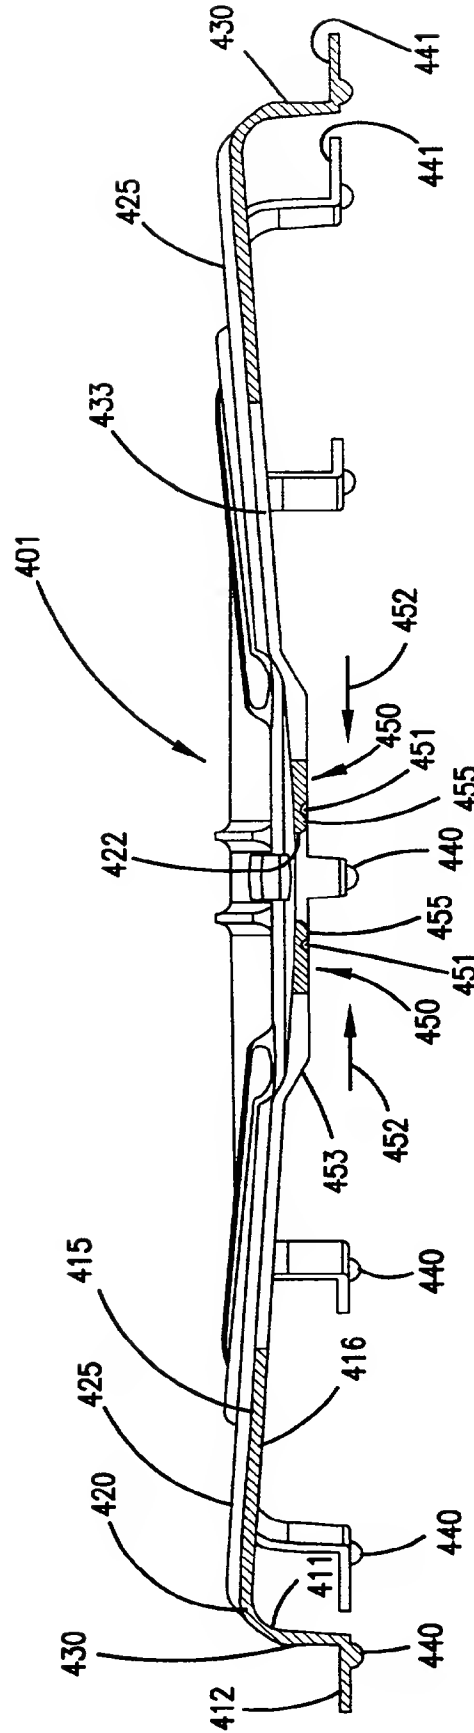
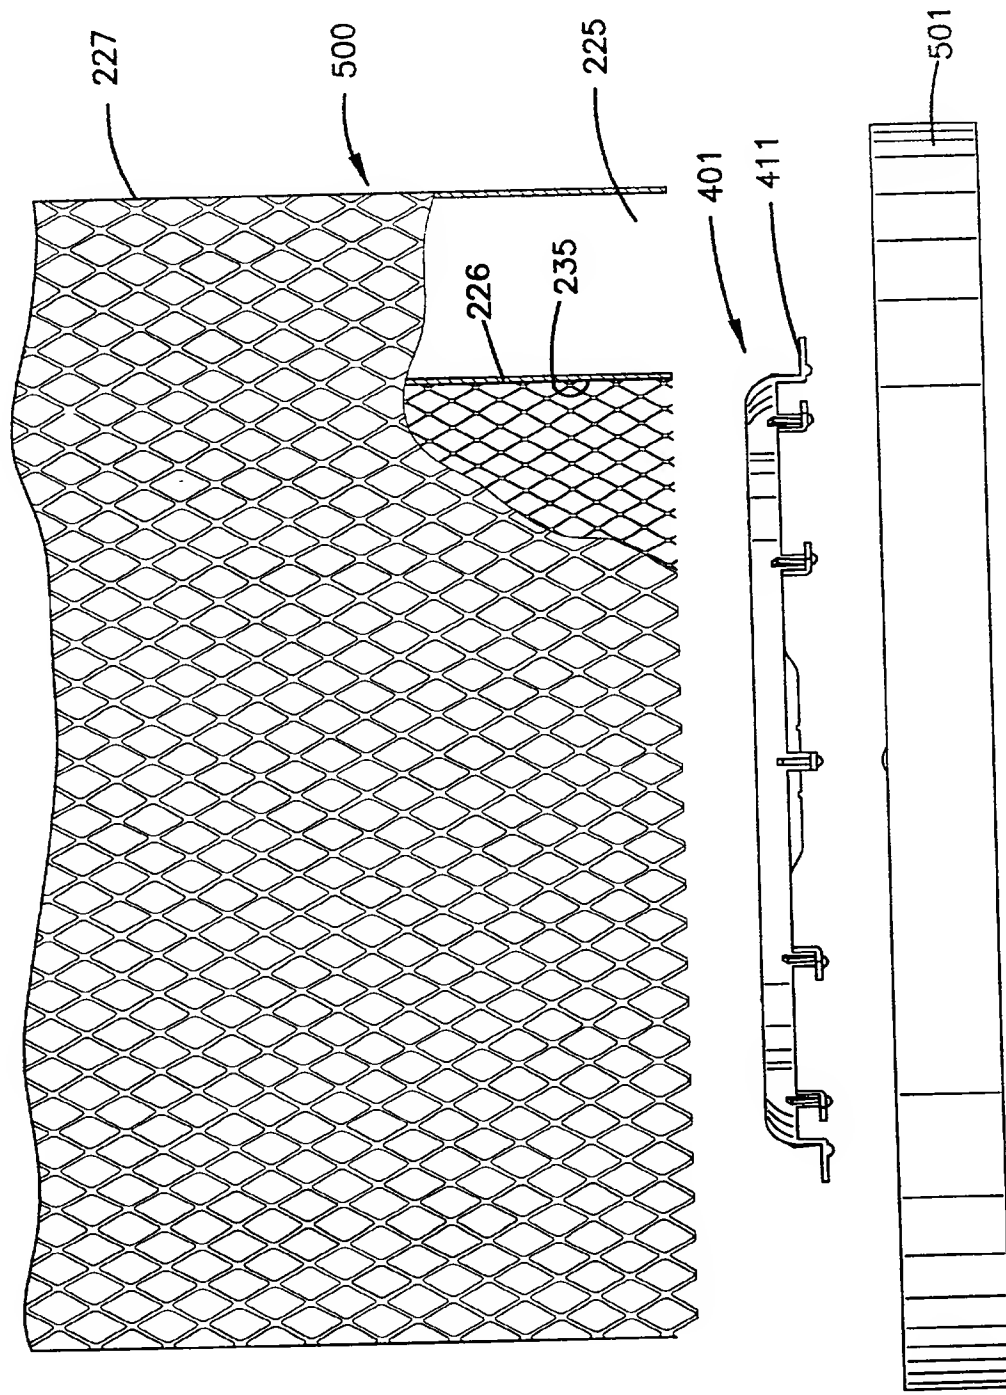


FIG. 11

FIG. 12



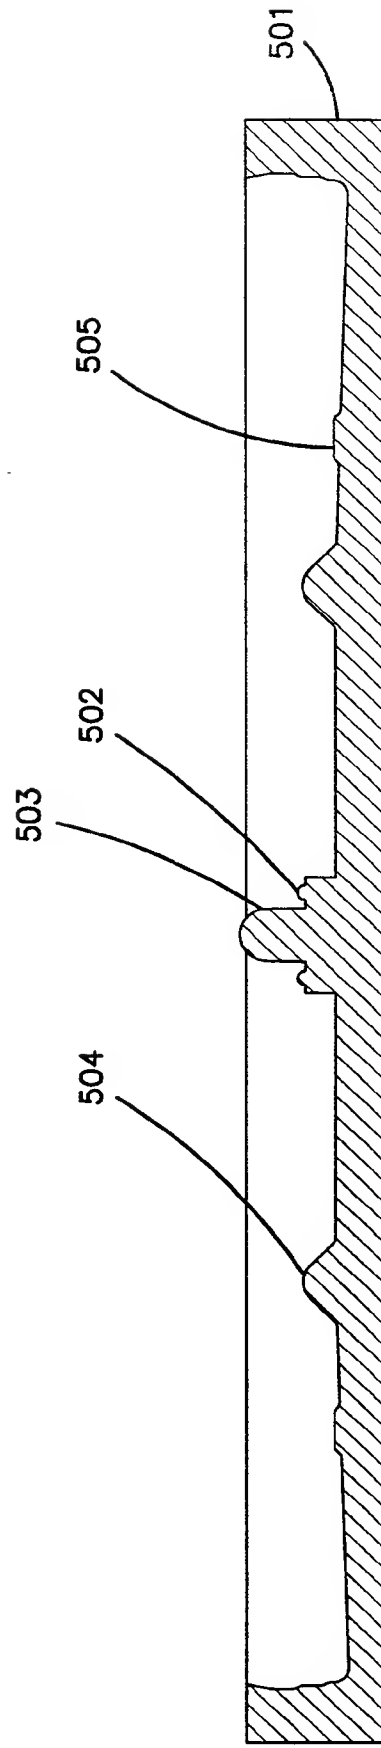
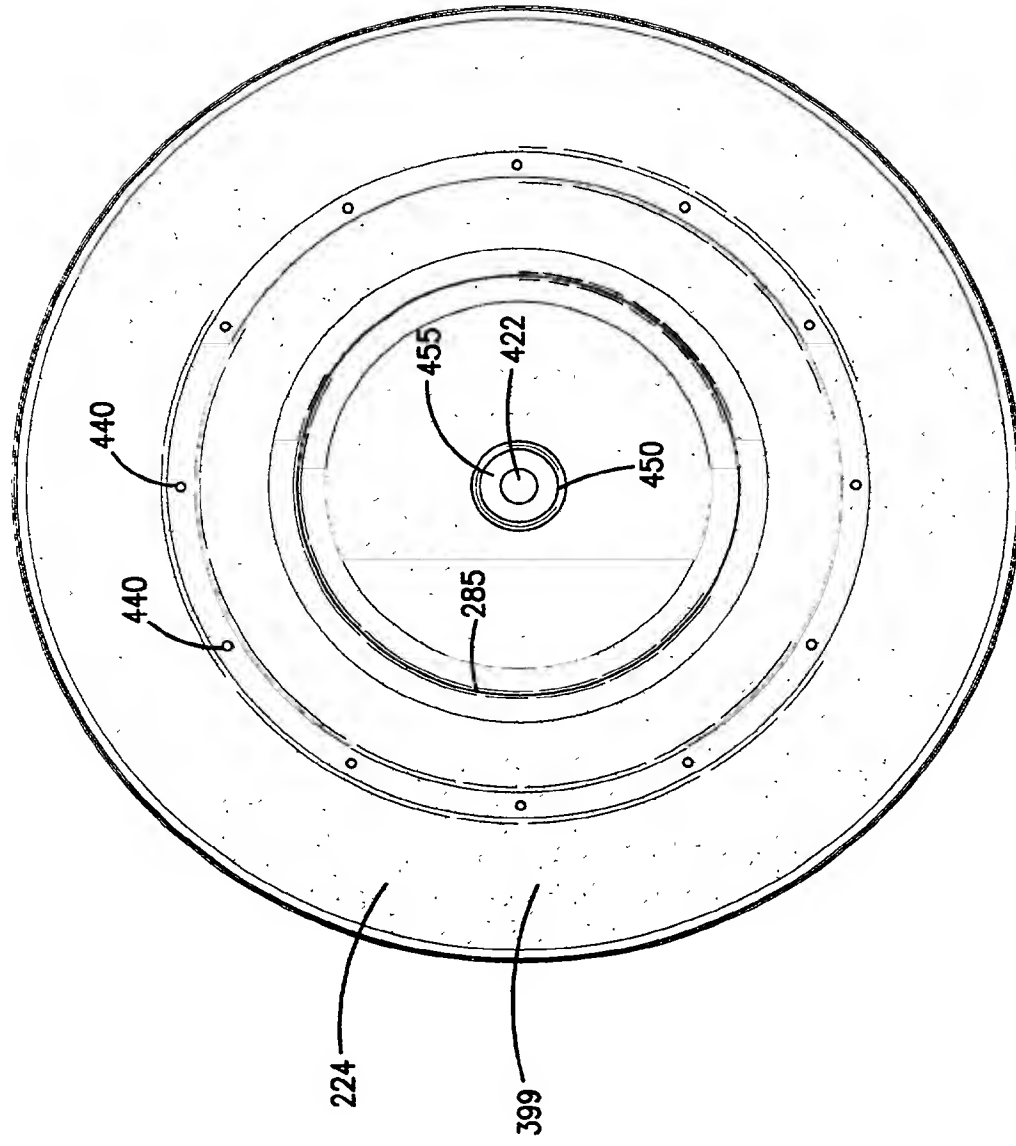


FIG. 13

FIG. 14





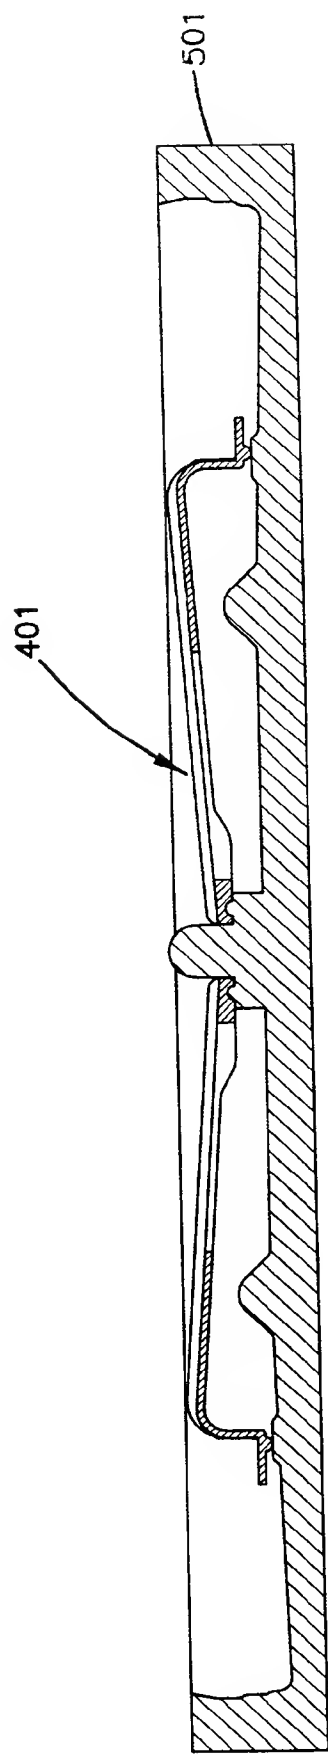


FIG. 15

MERCHANT, GOULD, SMITH, EDELL, WELTER & SCHMIDT

United States Patent Application

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: REVERSE FLOW AIR FILTER ARRANGEMENT AND METHOD

The specification of which

- a. ☐ is attached hereto  
b. ☒ was filed on June 27, 1997 as application serial no. 08/884,205, which I have reviewed and for which I solicit a United States patent.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56 (attached hereto).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on the basis of which priority is claimed:

- a. ☒ no such applications have been filed.  
b. ☐ such applications have been filed as follows:

FOREIGN APPLICATION(S), IF ANY, CLAIMING PRIORITY UNDER 35 USC § 119			
COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)
ALL FOREIGN APPLICATION(S), IF ANY, FILED BEFORE THE PRIORITY APPLICATION(S)			
COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)

I hereby claim the benefit under Title 35, United States Code, § 120/365 of any United States and PCT international application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)
08/742,244	October 31, 1996	pending
08/344,371	November 23, 1994	U S. Patent No. 5,613,992

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

U.S. PROVISIONAL APPLICATION NUMBER	DATE OF FILING (Day, Month, Year)

I hereby appoint the following attorney(s) and/or patent agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Adriano, Sarah B.	Reg. No. 34,470	Kettelberger, Denise	Reg. No. 33,924
Albrecht, John W.	Reg. No. P-40,481	Komanduri, Janaki	Reg. No. P-40,684
Batzli, Brian H.	Reg. No. 32,960	Kowalchyk, Alan W.	Reg. No. 31,535
Beard, John L.	Reg. No. 27,612	Kowalchyk, Katherine M.	Reg. No. 36,848
Beck, Robert C.	Reg. No. 28,184	Lacy, Paul E.	Reg. No. 38,946
Bejin, Thomas E.	Reg. No. 37,089	Lasky, Michael B.	Reg. No. 29,555
Berman, Charles	Reg. No. 29,249	Lindquist, Timothy A.	Reg. No. P-40,701
Bogucki, Raymond A.	Reg. No. 17,426	Lynch, David W.	Reg. No. 36,204
Bruess, Steven C.	Reg. No. 34,130	Mau, Michael L.	Reg. No. 30,087
Byrne, Linda M.	Reg. No. 32,404	McDaniel, Karen D.	Reg. No. 37,674
Canady, Karen S.	Reg. No. 39,927	McDonald, Daniel W.	Reg. No. 32,044
Carlson, Alan G.	Reg. No. 25,959	McDonald, Wendy M.	Reg. No. 32,427
Carter, Charles G.	Reg. No. 35,093	McIntyre, Iain A.	Reg. No. 40,377
Caspers, Philip P.	Reg. No. 33,227	Miller, William D.	Reg. No. 37,988
Chiapetta, James R.	Reg. No. 39,634	Mueller, Douglas P.	Reg. No. 30,300
Clifford, John A.	Reg. No. 30,247	Nasiedlak, Tyler L.	Reg. No. 40,099
Conrad, Timothy R.	Reg. No. 30,164	Nelson, Albin J.	Reg. No. 28,650
Cooper, Victor G.	Reg. No. 39,641	Orler, Anthony J.	Reg. No. P-41,232
Crawford, Robert	Reg. No. 32,122	Pauly, Daniel M.	Reg. No. 40,123
Daignault, Ronald A.	Reg. No. 25,968	Plunkett, Theodore	Reg. No. 37,209
Daley, Dennis R.	Reg. No. 34,994	Pollinger, Steven J.	Reg. No. 35,326
Dalglish, Leslie E.	Reg. No. P-40,579	Reich, John C.	Reg. No. 37,703
Daulton, Julie R.	Reg. No. 36,414	Reiland, Earl D.	Reg. No. 25,767
Davidson, Ben M.	Reg. No. 38,424	Schmaltz, David G.	Reg. No. 39,828
DiPietro, Mark J.	Reg. No. 28,707	Schmidt, Cecil C.	Reg. No. 20,566
Edell, Robert T.	Reg. No. 20,187	Schuman, Mark D.	Reg. No. 31,197
Epp Ryan, Sandra	Reg. No. 39,667	Schumann, Michael D.	Reg. No. 30,422
Farber, Michael B.	Reg. No. 32,612	Sebald, Gregory A.	Reg. No. 33,280
Funk, Steven R.	Reg. No. 37,830	Sharp, Janice A.	Reg. No. 34,051
Gabilan, Mary Susan	Reg. No. 38,729	Skoog, Mark T.	Reg. No. 40,178
Gates, George H.	Reg. No. 33,500	Smith, Jerome R.	Reg. No. 35,684
Glance, Robert J.	Reg. No. P-40,620	Stinebruner, Scott A.	Reg. No. 38,323
Golla, Charles E.	Reg. No. 26,896	Sumner, John P.	Reg. No. 29,114
Gorman, Alan G.	Reg. No. 38,472	Sumners, John S.	Reg. No. 24,216
Gould, John D.	Reg. No. 18,223	Tellekson, David K.	Reg. No. 32,314
Gresens, John J.	Reg. No. 33,112	Underhill, Albert L.	Reg. No. 27,403
Hamre, Curtis B.	Reg. No. 29,165	Vandenburgh, J. Derek	Reg. No. 32,179
Hillson, Randall A.	Reg. No. 31,838	Welter, Paul A.	Reg. No. 20,890
Hollingsworth, Mark A.	Reg. No. 38,491	Williams, Douglas J.	Reg. No. 27,054
Johnston, Scott W.	Reg. No. 39,721	Wood, Gregory B.	Reg. No. 28,133
Kastelic, Joseph M.	Reg. No. 37,160	Xu, Min S.	Reg. No. 39,536

I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Merchant, Gould, Smith, Edell, Welter & Schmidt to the contrary.

Please direct all correspondence in this case to Merchant, Gould, Smith, Edell, Welter & Schmidt at the address indicated below:

Merchant, Gould, Smith, Edell,  
Welter & Schmidt  
3100 Norwest Center  
90 South Seventh Street  
Minneapolis, MN 55402-4131

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

2	Full Name Of Inventor	Family Name ENGEL	First Given Name Donald	Second Given Name Francis
0	Residence & Citizenship	City Prior Lake	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
1	Post Office Address	Post Office Address 6480 Glasgow Trail S.E.	City Prior Lake	State & Zip Code/Country MN 55372/U.S.A.
Signature of Inventor 201: <i>Donald Francis Engel</i>			Date: <i>3-5-98</i>	
2	Full Name Of Inventor	Family Name BARTELS	First Given Name Dolan	Second Given Name
0	Residence & Citizenship	City Cresco	State or Foreign Country Iowa	Country of Citizenship U.S.A.
2	Post Office Address	Post Office Address 617 Gillette Ave.	City Cresco	State & Zip Code/Country IA 52136 U.S.A.
Signature of Inventor 202: <i>Dolan W Bartels</i>			Date: <i>3-20-98</i>	
2	Full Name Of Inventor	Family Name HACKER	First Given Name John	Second Given Name
0	Residence & Citizenship	City Bloomington	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
3	Post Office Address	Post Office Address 8416 York Road	City Bloomington	State & Zip Code/Country MN 55431 U.S.A.
Signature of Inventor 203: <i>John R Hacker</i>			Date: <i>3-9-98</i>	
2	Full Name Of Inventor	Family Name CRENSHAW	First Given Name Bruce	Second Given Name
0	Residence & Citizenship	City Indianapolis	State or Foreign Country Indiana	Country of Citizenship U.S.A.
4	Post Office Address	Post Office Address 1628 McCollough Dr.	City Indianapolis	State & Zip Code/Country IN 46260 U.S.A.
Signature of Inventor 204: <i>Bruce R. Crenshaw</i>			Date: <i>3-20-98</i>	
2	Full Name Of Inventor	Family Name HAROLD	First Given Name Don [DECEASED]	Second Given Name
0	Residence & Citizenship	City Prior Lake	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
5	Post Office Address	Post Office Address 16687 Lyons Ave. S.	City Prior Lake	State & Zip Code/Country MN 55372 U.S.A.
SIGNATURE FOR DECEASED INVENTOR DON HAROLD:			Date:	
BY: <i>Shirley A. Harold</i>			<i>5-14-98</i>	
PRINTED NAME: <i>Shirley A. Harold</i> LEGAL REPRESENTATIVE OF ESTATE OF DON HAROLD				

## **§ 1.56 Duty to disclose information material to patentability.**

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application, and
- (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim;
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
  - (i) Opposing an argument of unpatentability relied on by the Office, or
  - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

- (1) Each inventor named in the application;
- (2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.

S/N 08/884,205

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	ENGEL ET AL.	Examiner:	UNKNOWN
Serial No.:	08/884,205	Group Art Unit:	1305
Filed:	JUNE 27, 1997	Docket No.:	758.556US11
Title:	REVERSE FLOW AIR FILTER ARRANGEMENT AND METHOD		

CERTIFICATE UNDER 37 CFR 1.8: The undersigned hereby certifies that this correspondence is being deposited in the United States Postal Service, as first class mail, in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231 on MAY 19, 1998.

By: Brenda House  
Name: Brenda House

DECLARATION

Assistant Commissioner for Patents  
Washington, D.C. 20231

I, Shirley A. Harold, hereby state as follows:

1. Don Harold was named as an inventor in the above-referenced U.S. patent application.
2. Since the filing date of this patent application, Don Harold died.
3. I am the person named as the legal representative of the Estate of Don Harold.

Attached to this Declaration is proof of my authority.

4. I hereby declare that all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Dated: 5-14-98

Name: Shirley A. Harold  
Shirley A. Harold